


reverie

SPECIFICATIONS GUIDE





cabinetry



TEXTURED LAMINATE DOOR STYLE

FRAMED CONSTRUCTION FULL OVERLAY

EUROPEAN FRAMELESS CONSTRUCTION FULL OVERLAY


The textured laminate provides a very durable finish that is easy to clean and perfect for any modern or contemporary design.

Leedo's Thermofused Technology replicates both the beauty and feel of natural wood cabinets, while producing a visually stunning, realistic high-end product with extraordinary durability.


Features and benefits

- Melamine slab door style on particleboard
- 5/8" thick door and drawer front
- Solid wood frame finished to match (Framed only)
- Edgebanding on 4 sides
- Durable and easy to clean
- Full overlay
- Door back matches door front
- Route for glass (RFG) door option is not available.
- Hardware is required


LUCINA

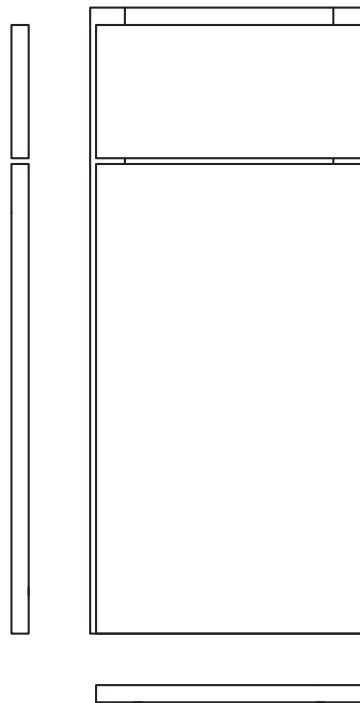


LUCERNE

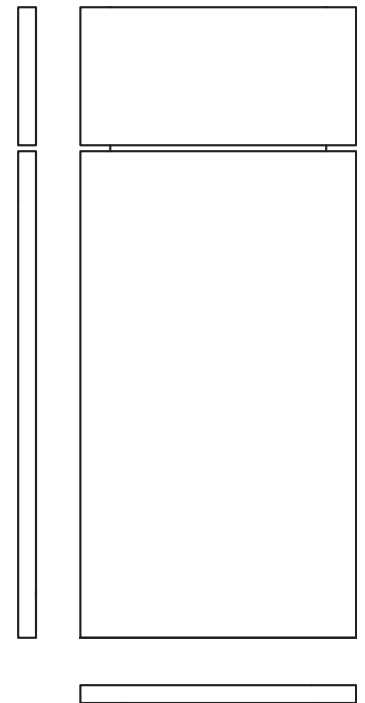


Available in the following colors




Chestnut




Glacier




Grey Cashmere



Harmony




Light Teak




Midnight Teak




Morning Fog



Natural Elm



Obsidian Ash



Timeless



Weathered Oak



White Tusk



www.leedo.com 866.GO.LEEDO

Printed in the United States of America

0426

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or wood grains may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of wood grains and color tones.

THERMOFOIL DOOR STYLE


FRAMED CONSTRUCTION
FULL OVERLAY

EUROPEAN FRAMELESS
CONSTRUCTION
FULL OVERLAY

The smooth lines of our thermofoil door styles create a clean look that works in almost any design or décor. Our thermofoil door styles are created through an intense heat and pressure bonding process where rigid vinyl is applied to a sculpted fiberboard to provide a uniform and durable finish.

Features and benefits

- 3D laminate flat panel shaker door style
- 5/8" thick melamine-backed doors and drawer fronts
- Solid wood frame finished to match (Framed only)
- Durable and easy to clean
- Full overlay
- Route for glass (RFG) door option available for wall cabinets. Doors prepared for glass do not include glass or glass fasteners.
- Hardware is required

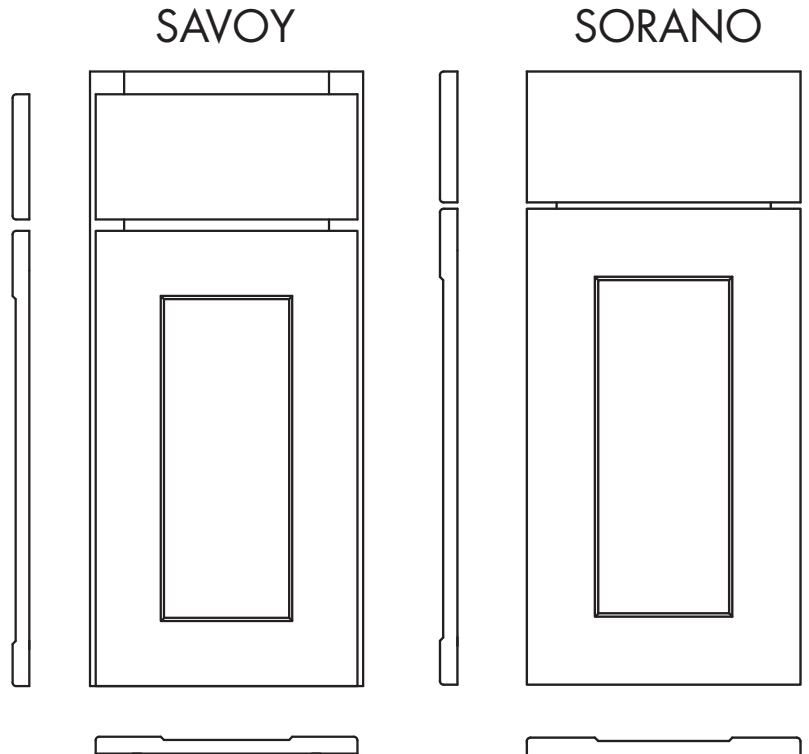

Available in the following colors



www.leedo.com 866.GO.LEEDO

Printed in the United States of America

0426

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or wood grains may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of wood grains and color tones.



countertops


GRANITE DECORATIVE COUNTERTOP SOLUTIONS

TIER 1


Features and benefits

- Available in both 2cm and 3cm thickness
- Made by nature, so every granite top is unique
- Natural stone product with rich beauty and timeless appeal
- Perfect countertop for undermount sinks

Available in the following styles

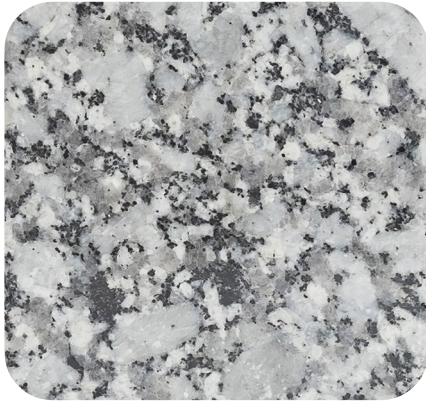

Babe White - GR10133

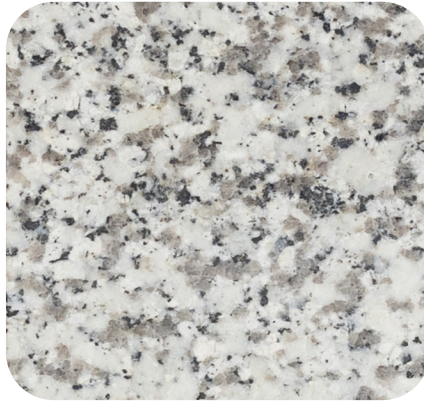


Ivory White - GR10116 Max 110°



New Butterfly White - GR10059



Salt and Pepper - GR10062 Max 110°

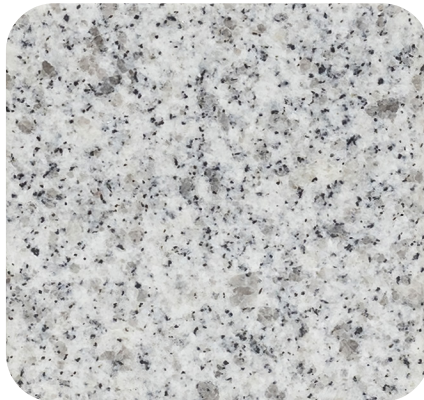

Sardo White - GR10136



Sesame Grey - GR10131



Silver White - GR10132

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETRY | OCT 2024


Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.





vinyl plank flooring

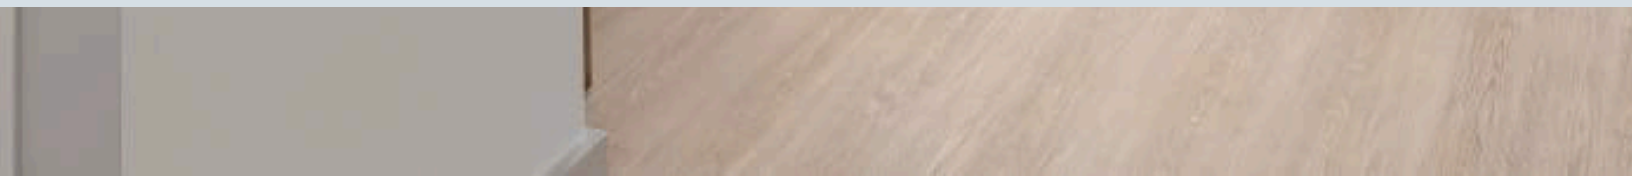



Kings Tide Interiors

Avian Collection

2mm 8 and 12 mil Glue Down LVT

309- Mallard





Avian Collection

Product Dimensions: 7" x 48"

Thickness: 2mm

Wear Layer: 8 mil

Finish: Ceramic Bead

SF Per Carton: 51.33

SF Per Pallet: 2,566.50

Cartons Per Pallet: 50

Pallet Weight (KG): 890

SF Per Container: 51,330.00

Container Weight (KG): 17,800

Installation: Direct Glue

*Warranty: 5 Year Residential****

Color Variation: Moderate

Attached Pad: No

Product Dimensions: 7" x 48"

Thickness: 2mm

Wear Layer: 12 mil

Finish: Ceramic Bead

SF Per Carton: 51.33

SF Per Pallet: 2,566.50

Cartons Per Pallet: 50

Pallet Weight (KG): 890

SF Per Container: 51,330.00

Container Weight (KG): 17,800

Installation: Direct Glue

*Warranty: 15 year Residential****

Color Variation: Moderate


Attached Pad: No

*** Note all warranties are based on King Tide Interiors Limited Product Warranty





Avian Collection

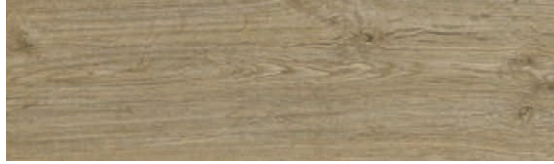

Finch - 301




Egret - 302



Wren - 303



Tern - 304

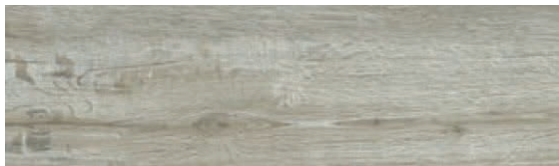

Blue Heron - 305



Robin - 306



Sparrow - 307




Barred Owl - 308



Mallard - 309



King Fisher - 310

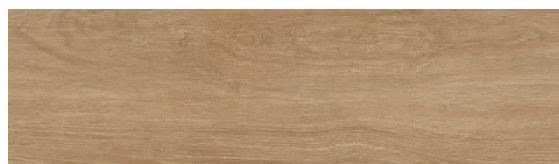

Sandpiper - 311



Chickadee - 312



Osprey - 202





tiles



Roca

Jewels

Jewels

The brilliance of marble is captured in this stunning tile collection, which radiates sophistication and elegance. Whether you prefer a polished or matte finish, each tile features a distinct marble-inspired design that replicates the natural beauty and uniqueness of these stones. With a vast array of options to choose from, this collection caters to every taste and style.



Vince White 24"x48"

Glazed Porcelain

24"x48" R - 12"x24" R



Etienne 12"x24" R



Laurent White 24"x48" R



Mattia White 12"x24" R

Jewels

Glazed Porcelain



24"x48" R 12"x24"
60x120 cm 30x60 cm

Etienne Cream



24"x48" R PO



24"x48" R UP



12"x24" R PO



12"x24" R UP

Etienne Light Gray



24"x48" R PO



24"x48" R UP



12"x24" R PO



12"x24" R UP



Etienne Gray



24"x48" R PO



24"x48" R UP



12"x24" R PO




12"x24" R UP




Jewels

Glazed Porcelain

6.5-8.0 mm |       | **24"x48" R** 60x120 cm | **12"x24"** 30x60 cm

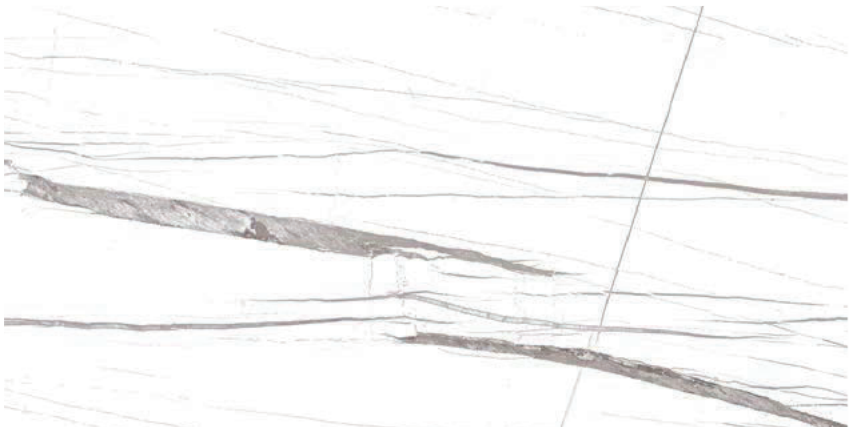

Laurent White



24"x48" R PO




12"x24" R PO



12"x24" R UP




Mattia White



24"x48" R PO



12"x24" R PO



24"x48" R UP



12"x24" R UP



Laurent White 24"x48" R



Mattia White 12"x24" R


Jewels

Glazed Porcelain

8.0-9.0 mm |        | **24"x48" R** 60x120 cm **12"x24"** 30x60 cm



Maurice Black



24"x48" R PO



Therry Cream



12"x24" R PO



12"x24" R UP



Maurice Black 24"x48" R



Therry Cream 12"x24" R

Jewels

Glazed Porcelain

6.5-8.0

mm

P

M

V2

24"x48" R

12"x24"

60x120 cm

30x60 cm

Vince White

24"x48" R PO

24"x48" R UP

12"x24" R PO

12"x24" R UP

Vince White 24"x48" R

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM	
		Polished	Unpolished
Water Absorption	C373	<=0.5%	<=0.5%
Break Strength	C648	Min. 275	Min. 275
Chemical Resistance	C650	Class A (Resist) ¹	Class A (Resist) ¹
Stain Resistance	C1378	Class A	Class A
Frost Resistance	C1026	Resistant	Resistant
Thermal Shock Resistance	C484	Resistant	Resistant
Crazing Resistance	C424	Resistant	Resistant
Group	See FAQ's	4	4
PEI- Glazed Tiles	C1027	PEI (III)	PEI (III)
Dynamic Coefficient of Friction (DCOF)	A326.3	<0.42	>=0.42
Shade and Texture Rating	CTDA "V"	V2-V3	V2-V3
Facial Dimensions	C499	Pass	Pass
Range of Thickness	C499	Pass	Pass
Warpage	C485	Pass	Pass
Wedging	C502	Pass	Pass

Packaging Information

Size	SF per carton	PC per carton	BX per pallet
12"x24" R	9.69	5	64
24"x48" R	23.25	3	27
24"x48" R (Maurice)	15.50	2	29

12 | Jewels

Jewels | 13



Color Collection



CERAMIC

Color Collection

Our flagship collection. This classic has been revamped with a variety of formats and finishes to make it more modern and versatile. Ideal for any commercial or residential space, let our color palette be the inspiration for your next project.


Color Collection Taupe Bright 6"x18"

Ceramic Wall

2"x8" - 3"x6" - 3"x12" - 3"x12" Picket - 4 1/4"x4 1/4" - 4 1/4"x10" - 4"x12" - 4"x16" - 6"x6" - 6"x18" - 8"x24" - 13"x24" - 10"x28"



Color Collection White Ice Bright 2"x8"

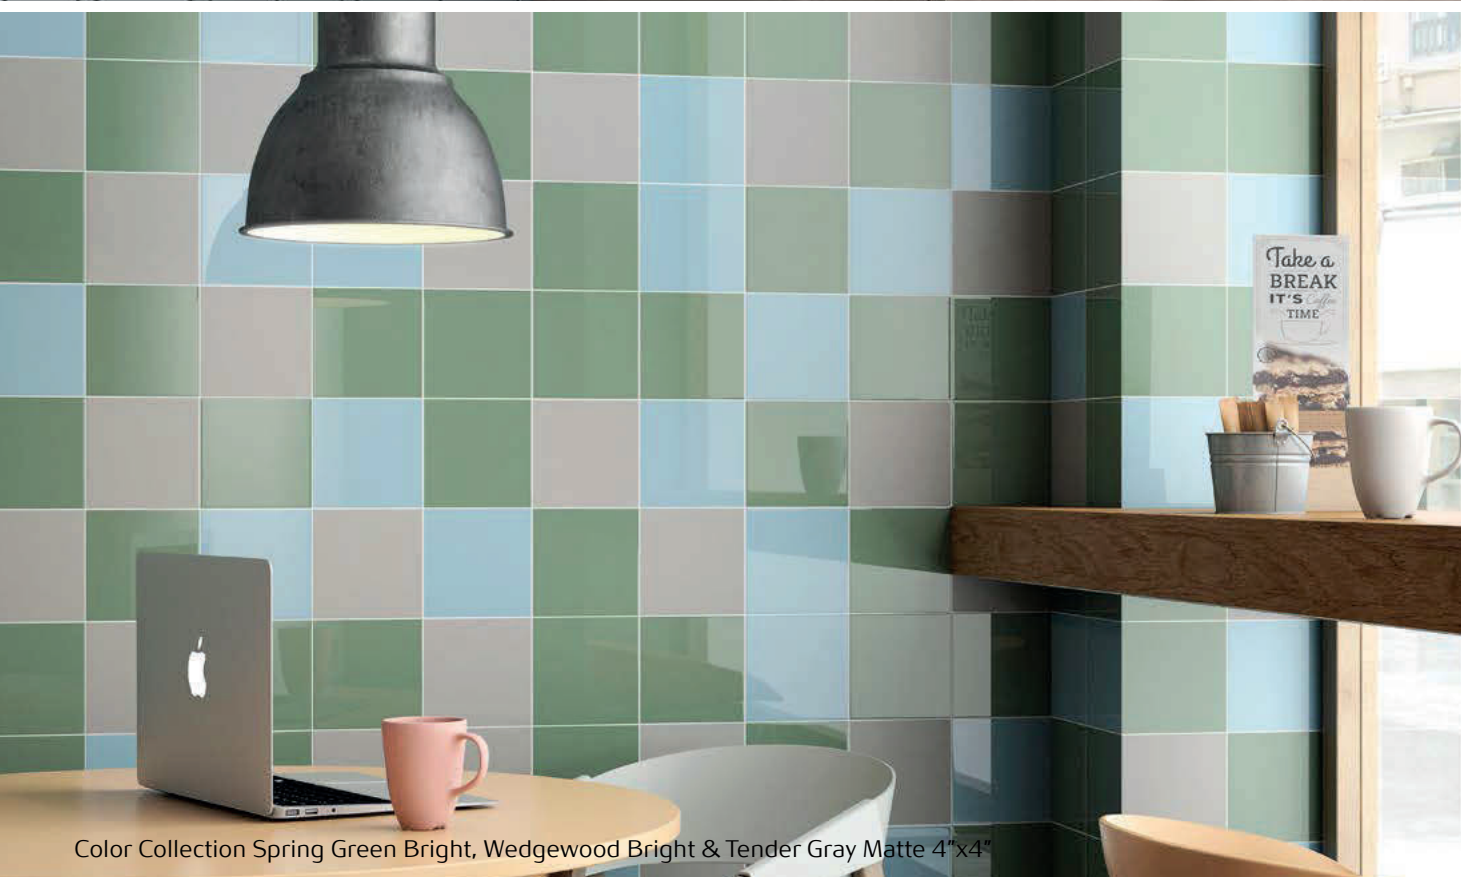


Color Collection Spring Green Bright, Wedgewood Bright & Tender Gray Matte 4"x4"



Color Collection White Ice Bright 4"x4"

Color Collection


Ceramic Wall



10"x28"
25x71 cm




13"x24"
33x60 cm



8"x24"
20x60 cm



6"x18"
15x45 cm



6"x6"
15x15 cm




4"x12"
10x30 cm



4 ¼"x16"
11x40 cm



4 ¼"x10"
11x25 cm



4 ¼"x4 ¼"
11x11 cm



3"x6"
7.7x15 cm



3"x12"
7.7x30.5 cm




3"x12" Picket
7.7x30.5 cm




2"x8"
5x20 cm


GROUP 0




White Ice Bright U081
2x8, 3x6, 3x12, 3x12 Picket,
4¼x4¼, 4¼x10, 4x12, 4¼x16,
6x6, 6x18, 8x24, 13x24, 10x28




Biscuit Bright U074
2x8, 3x6, 4¼x4¼, 4¼x10, 4¼x16,
6x6, 6x18




Tender Gray Bright U761
2x8, 3x6, 3x12, 3x12 Picket,
4¼x4¼, 4¼x10, 4¼x16, 6x6, 6x18



White Ice Matte U281
2x8, 3x6, 3x12, 3x12 Picket,
4¼x4¼, 4¼x10, 4¼x16, 6x6, 6x18




Biscuit Matte U274
3x6, 4¼x4¼, 4¼x10, 4¼x16, 6x6



Tender Gray Matte U261
3x6, 4¼x4¼, 4¼x10, 4¼x16, 6x6

GROUP 1



Snow White Bright U072
3x6, 4¼x10



Black Bright U759
3x6, 4¼x4¼, 6x6




Taupe Bright U789
3x6, 4¼x4¼, 4¼x10, 6x6



Taupe Matte U289
3x6, 4¼x4¼, 6x6

GROUP 2



Bone Bright U078
3x6, 4¼x4¼, 6x6



Dark Gray Bright U769
3x6, 4¼x4¼, 6x6




Cobalt Bright U726
3x6, 4¼x4¼, 6x6

GROUP 3



Mustard Bright U745
3x6, 4¼x4¼



Yellow Bright U744
3x6, 4¼x4¼

GROUP 3



Olive Green Bright U715
3x12, 4¼x16



Soft Blue Bright U723
3x12, 4¼x16



Deep Blue Bright U725
3x12, 4¼x16



Kelly Bright U719
3x6, 4¼x4¼



Spring Green Bright U711
3x6, 4¼x4¼

GROUP 4




Red Pepper Bright U739
3x6, 4¼x4¼, 4¼x10, 6x6

Color Splash



Neu Gray U705
3x12, 4x12



Petrol U706
3x12, 4x12

Color Collection Trims

Ceramic Wall

6.3-8

mm

B

M

V1

25%

RECYCLED


7mm

slim

Recta Tile

Basic Trims

Bullnose




2x6: S4269 3x6 3/4: S4639 4 1/4x4 1/4: S4449
2x8: S4289 3x8: S4659 6x6: S4618
3x9: S4310 3x9.5: S4312 4 1/4x6: S4659

Bullnose Corner (Radius Corner):



2x2: SN4269

Radius Bullnose



A4200: 2x6
AN4200: 2x2

Radius Bullnose Corner



A4200: 2x6
AN4200: 2x2

Bullnose Corner



6x6: SN4669 3x3: SN4339 4 1/4x4 1/4: SN4449 2x2: SN4269


Functional Trims

Cove Base Tile (Round Top)




AT3410: 4 1/4x6
AT3610: 6x6

Cove Base Tile (Flat Top Painted)



AT1663: 3 3/4x6
AT3401: 4 1/4x4 1/4

Corner Cove



4 1/4x6 LEFT COVE CORNER: ATCL3410
4 1/4x6 RIGHT COVE CORNER: ATCR3410
4 1/4x4 1/4 LEFT COVE CORNER: STCL3401
4 1/4x4 1/4 RIGHT COVE CORNER: STCR3401
6x6 RIGHT COVE CORNER: ATCR610
6x6 LEFT COVE CORNER: ATCL6103
3 3/4x6 LEFT COVE CORNER: STCL1663
3 3/4x6 RIGHT COVE CORNER: STCR1663

Sanitary Cove Base



SANITARY: 6x10

Decorative Trims

Chair Rail



CHAIR: 2X10 CHAIR RAIL
VICTORIAN: 2 1/2"x6"

Pencil



PENCIL: 1/2"x6"

Chair Rail Outside Corner



2X3/4: CHAIR OC

Rope Tile




678: 7/8"x6"

Twist Pencil



TWIST: 1/2"x10"

Liner



76: 3/4"x6"

Edges Trims

V-Cap



AT8262: 2x6

V-Cap Outside Corner



ATC8262: 2x2

Quarter Round



A106: 3/4"x6"

Skirting Outside Corner



1/2x6: SKIRT OC

Quarter Round Corner



AK106: 3/4x3/4
AC106: 3/4x6"

Sink Rail Outside Corner



2x3/4: CRN OC

Trims Descriptions

SKU #	Description	SKU #	Description	SKU #	Description
S4269	Bullnose 2"x6"	SN4269	Bullnose Corner4" 1/4x4 1/4"	CHAIR	Chair Rail 2"x10"
S4289	Bullnose 2"x8"	SN4449	Bullnose Corner (Radius Corner) 4" 1/4x4 1/4"	VICTORIAN	Chair Rail 2 1/2"x2"x6"
S4310	Bullnose 3"x10"	AT3410	Cove Base Tile (Round Top) 4 1/4"x6"	CHAIR-OC	Chair Rail Outside Corner 2"x3/4"
S4312	Bullnose 3"x12"	AT3610	Cove Base Tile (Round Top) 6"x6"	VICTORIAN	Chair Rail Outside Corner 2" 1/2x6"
S4639	Bullnose 3"x6" 3"	AT1663	Cove Base Tile (Flat Top Painted) 3 3/4"x6"	TWIST	Twist Pencil 1/2"x10"
S4369	Bullnose 3"x6"	AT3401	Cove Base Tile (Flat Top Painted) 4 1/4"x4 1/4"	PENCIL	Pencil 1/2"x6"
S439	Bullnose 3"x9.5"	ATCL3410	Corner Cove 4 1/4"x6" Left Cove Corner	678	Rope Tile 7/8"x6"
S4169	Bullnose 4 1/4"x16"	ATCR3410	Corner Cove 4 1/4"x6" Right Cove Corner	76	Liner 3/4"x6"
S4449	Bullnose 4 1/4"x4 1/4"	STCL3401	Corner Cove 4 1/4"x4 1/4" Right Cove Corner	AT8262	V-Cap 2"x6"
S4618	Bullnose 6"x18"	STCR3401	Corner Cove 4 1/4"x4 1/4" Right Cove Corner	ATC8262	V-Cap Outside Corner 2"x2"
SN4269	Bullnose Corner (Radius Corner) 2"x2"	ATCR3610	Corner Cove 6"x6" Right Cove Corner	A106	Quarter Round 3/4x6
A4200	Radius Bullnose 2"x6"	ATCL36103	Corner Cove 6"x6" Left Cove Corner	SKIRT-OC	Skirting Outside Corner 1/2"x6"
A4200	Radius Bullnose Corner 2"x6"	STCL1663	Corner Cove 3 3/4"x6" Left Cove Corner	AK106	Quarter Round Corner 3/4"x3/4"
AN4200	Radius Bullnose Corner 2"x2"	STCR1663	Corner Cove 3/4"x6" Right Cove Corner	AC106	Quarter Round Corner 3/4"x6"
SN4669	Bullnose Corner 6"x6"	SANITARY	Sanitary Cove Base 6"x10"	SINK	Sink Rail Outside Corner 3"x10"
SN4339	Bullnose Corner 3"x3"				



Color Collection White Ice Bright & Mustard Bright 4"x4"



Color Collection White Ice Bright 2"x8"



Color Collection White Ice Matte 3"x6"

8 | Color Collection

Color Collection | 9


Color Collection

Ceramic Wall




Trims Installation Suggestion

4 1/4" x 4 1/4" Conventional Square in Corners

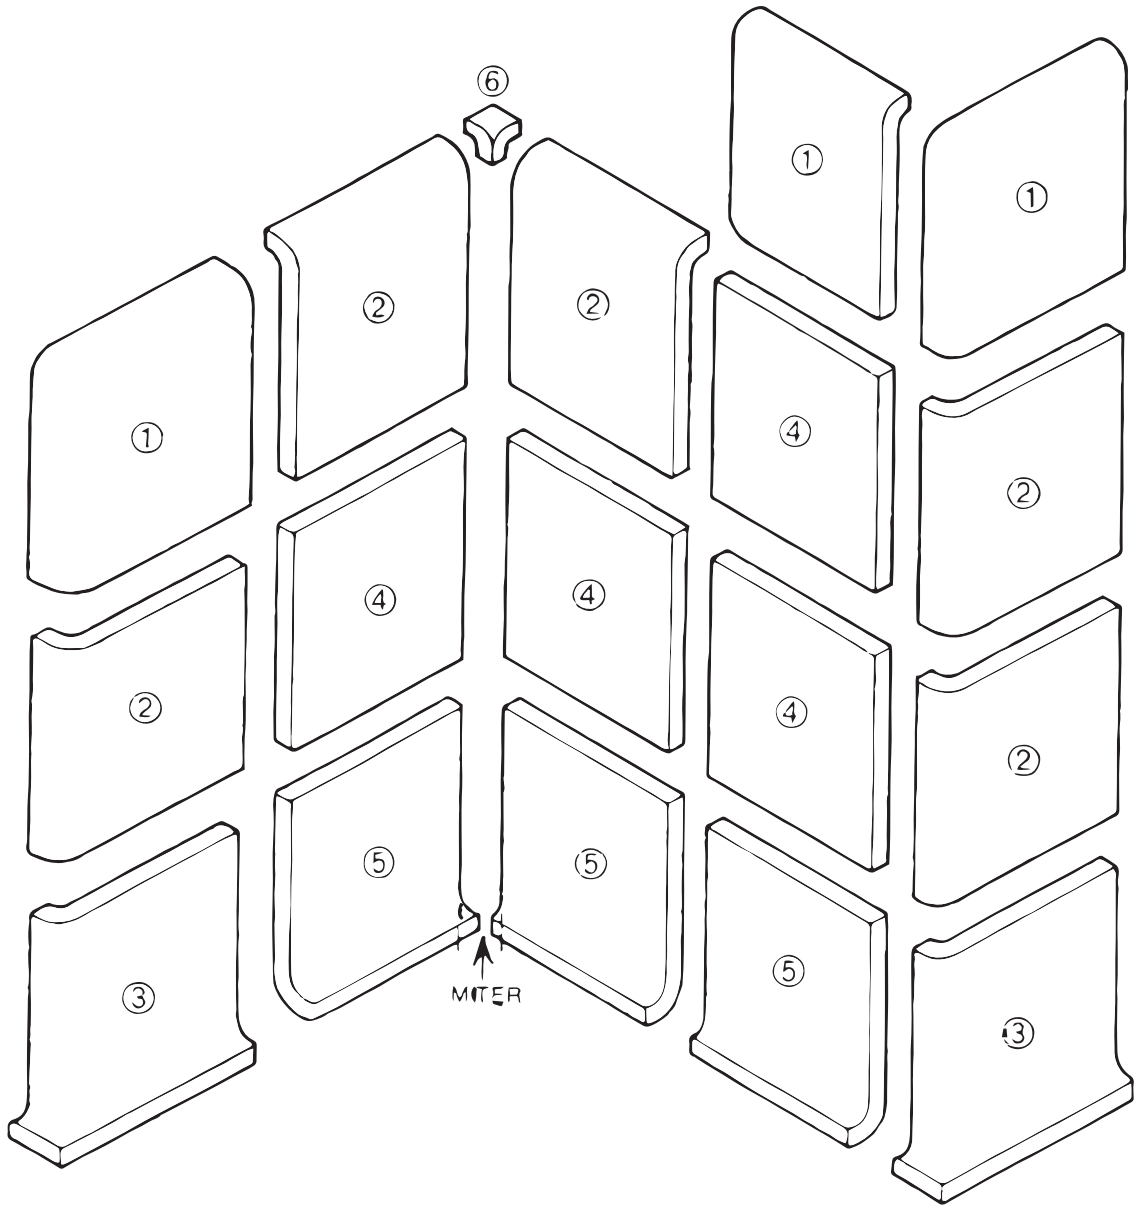

- 1. SN4449 - 4 1/4 x 4 1/4 Surface Bullnose Angle
- 2. S4449 - 4 1/4 x 4 1/4 Surface Bullnose
- 3. STCR3401 - 4 1/4 x 4 1/4 Cove Angle
- 4. 4 1/4 x 4 1/4 Field Tile
- 5. AT3401 - 4 x 4 Cove Base
- 6. AK106 - 3/4 x 3/4 Universal In Angle

4 1/4" x 4 1/4" Conventional Square in Corners

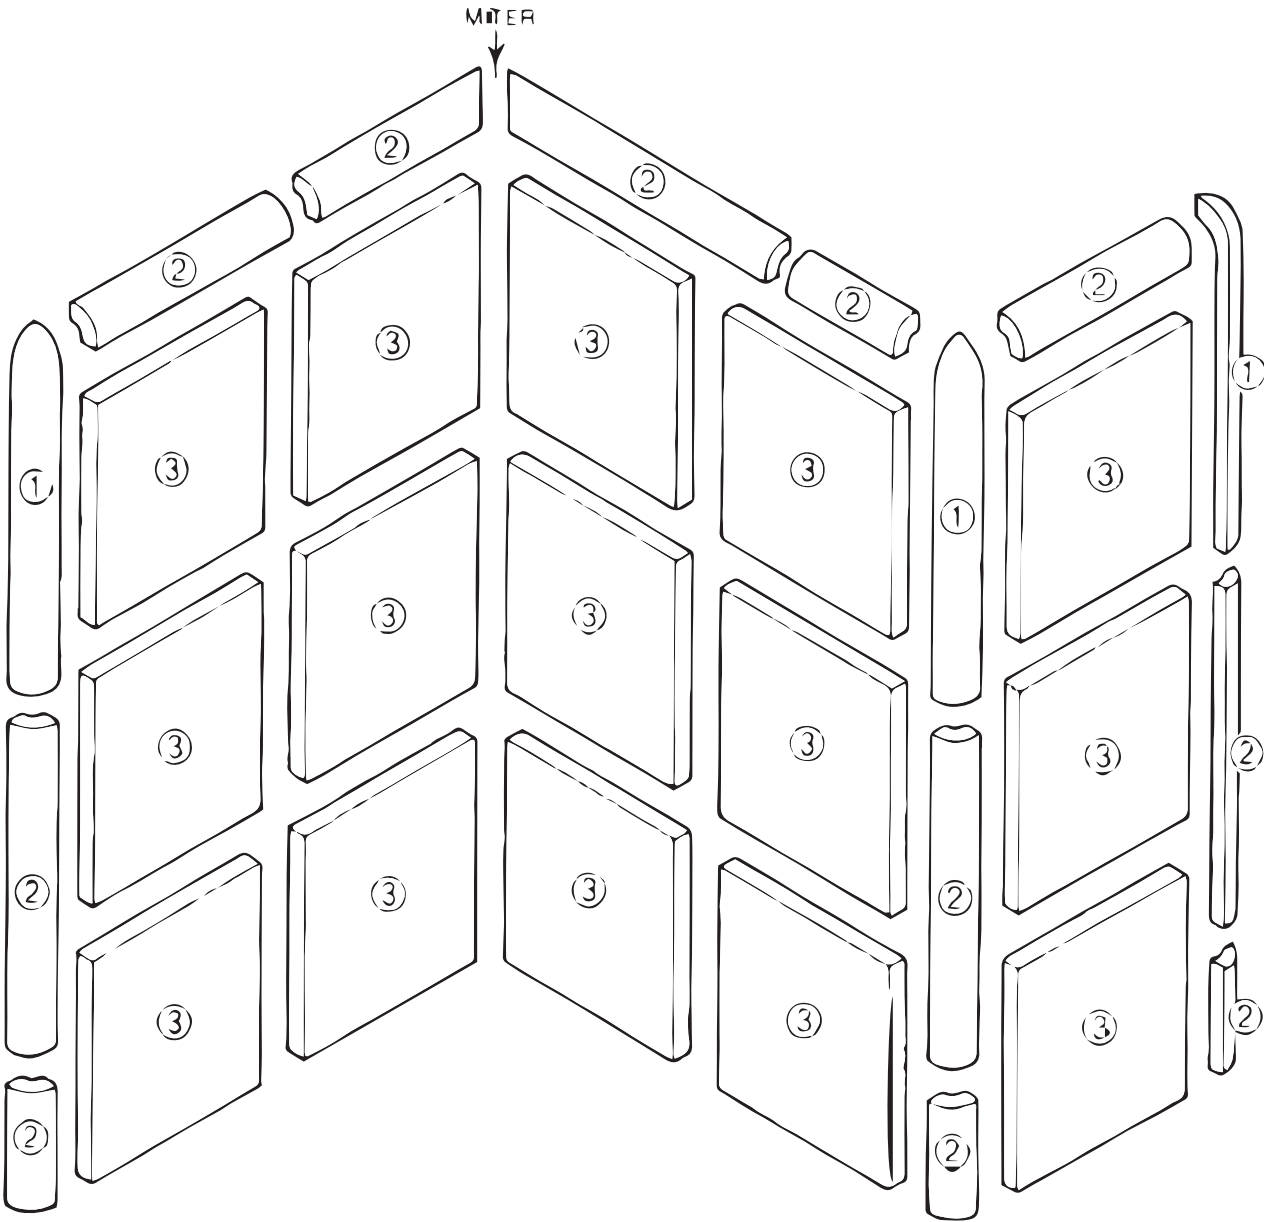

- 1. AC106 - 3/4 x 6 Bead Out Angle
- 2. A106 - 3/4 x 6 Bead
- 3. 4 1/4 x 4 1/4 Field Tile


Color Collection

Ceramic Wall



Trims Installation Suggestion

6"x6 Thin-Set Square in Corners

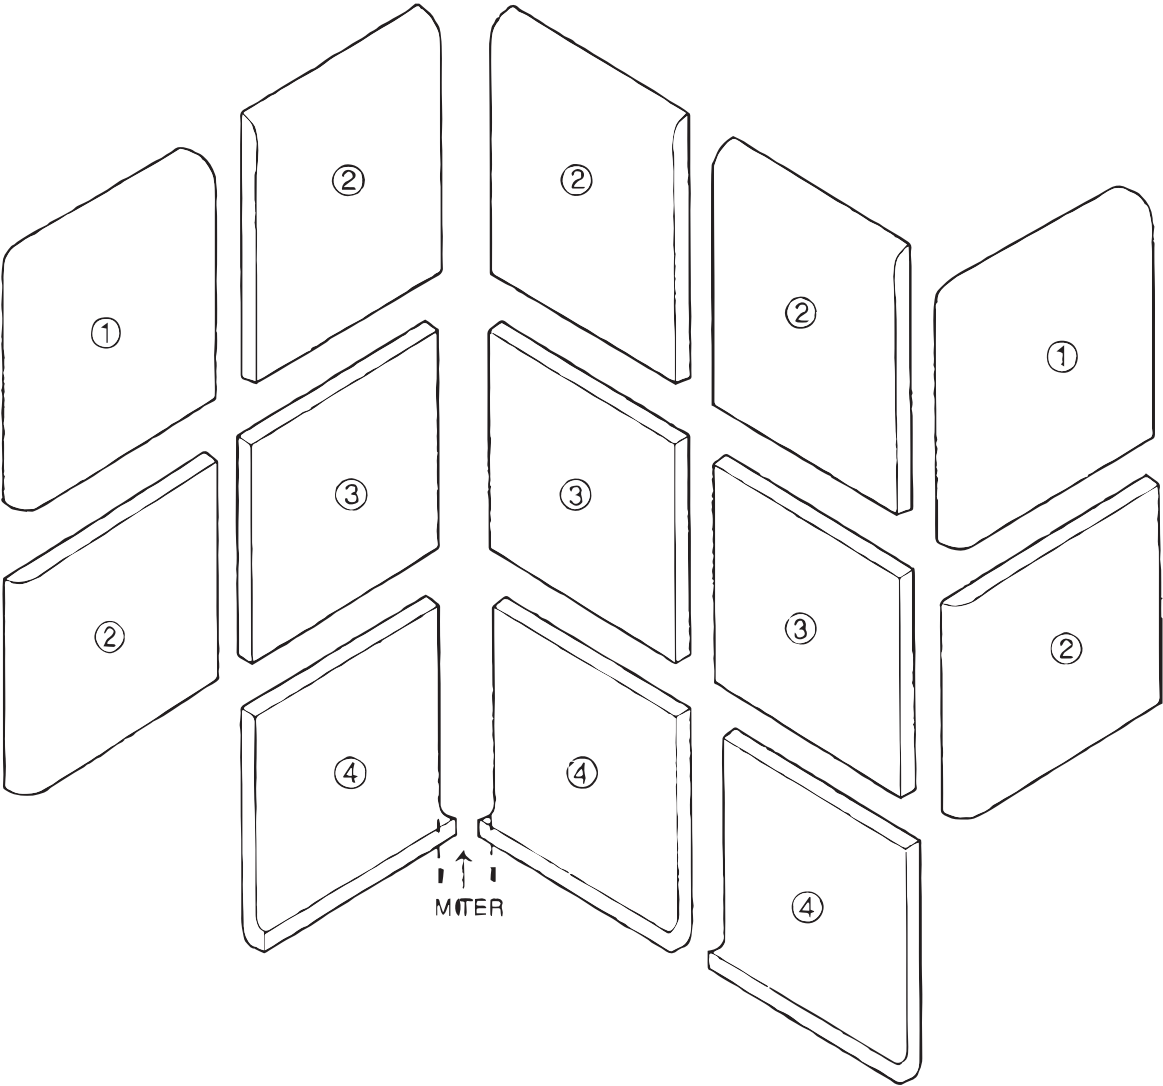

- 1. SN4669 - 6x6 Surface Bullnose Angle
- 2. S4669 - 6x6 Surface Bullnose
- 3. 6x6 Field Tile
- 4. AT3610 - 6x6 Cove Base



Color Collection White Ice Bright 6"x6"



Color Collection Tender Gray Bright 3"x6"



Color Collection Biscuit Matte 4"x6"

Color Collection

Ceramic Wall

Technical Specifications

CHARACTERISTICS	STANDARD	DECLARED ASTM
Water Absorption	C373	>10%
Break Strength	C648	Meets or exceeds
Scratch Hardness	MOH's Scale	3
Chemical Resistance	C650	Unaffected
Shade and Texture Rating	CTDA "V"	V1
Warpage	C485	Pass
Wedging	C502	Pass

Packaging Info

Size	SF per carton	PC per carton	BX per pallet
2"x8"	6.50	60	120
3"x6"	10.00	80	60
3"x6"	11.26	88	76
3"x12"	12.59	50	99
3"x12"	12.64	50	99
3"x12" Picket	11.79	50	99
4¼"x4¼"	10.00	80	60
4¼"x10"	11.25	38	78
4"x12"	12.64	32	60
4"x12"	11.51	32	60
4¼"x16"	15.33	32	60
6"x6"	12.60	50	48
6"x8"	6.45	60	120
6"x18"	12.00	16	96
6"x18" White Ice (7mm)	13.45	18	90
13"x24"	23.49	11	32
10"x28"	13.13	7	42



light fixtures



Project		Catalog #		Type	
Prepared by		Notes		Date	



HALO

HLCE Disk Light Bulk Packs

This LED Disk Light is a low profile design that mounts directly to the ceiling or junction box with a stylish look. Phase cut dimming down to 10%.

Typical Applications

Residential • Multifamily • Hospitality

Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 3](#)
- Photometric Data [page 4](#)
- Product Warranty
- Dimming Guide




Refer to ENERGY STAR Qualified Products List.
Can be used in compliance with California Title 24 high efficiency requirements.
Certified to California Air Resources Board (CARB) under JAB.

air

Top Product Features

- Dedicated 3000K, 4000K, 5000K; 90 CRI minimum
- Below the ceiling installation, no clips or plates needed
- Installs in most 3-1/2" and 4" standard and pancake junction boxes (see [Compatible Junction Boxes](#))
- Dimmable down to 10%
- Damp Location Listed

Dimensional and Mounting Details

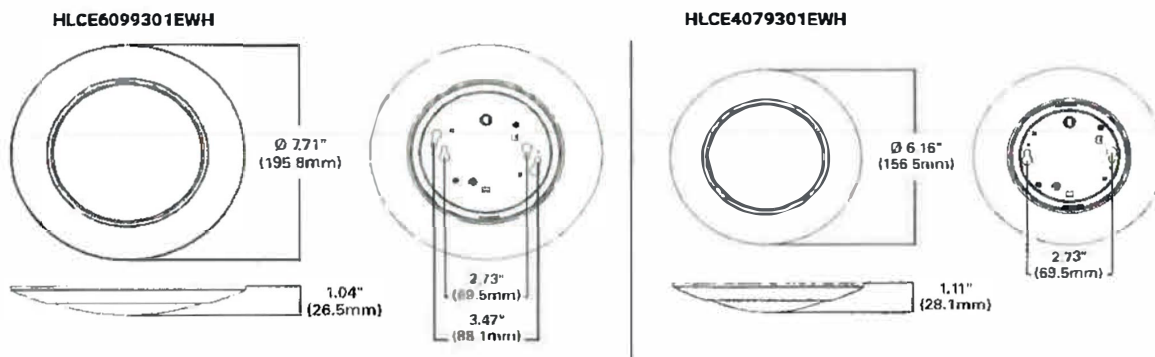

1 Review the product's Dimming Guide for approved compatible dimmers.
T24 and RoHS are self-tested by Cooper Lighting Solutions. Not a third party certification.



PS51025223 page 1
August 2020



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Crain LED Outdoor Sconce CRNW Series



Features

Modern design. Provides lighting in residential, commercial, and hospitality applications. Fixture mounts to standard junction box (not included).

Emergency Back-Up (Optional '-BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

Dusk-to-Dawn Photocell (Optional '-PC')

Construction

Aluminum housing. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black powder coated finish or Textured Grey finish

Diffuser

White acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.
 0-10V dimming (120-277V). TRIAC (120V).
 Minimum starting temp -4° F / -20°C

Lamping

Fixture includes a LED modules capable of producing.
 20W = 1450 delivered lumens
 24W = 1800 delivered lumens
 Adjustable Color Temp: 2700K, 3000K, 3500K, 4000K or 5000K (CCT).
 Rated for 50,000 Hrs , 90 CRI

Certification

All fixtures are cETLus listed for wet locations.
 Title 24/JA8 Compliant


Warranty

Limited warranty. This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.
 RESTRICTIONS APPLY BASED ON LOCATION.

Products ordered with battery back-up:

Fixture must be installed and the battery energized within six months of the purchase date to remain eligible for warranty coverage. Failure to comply may result in complete battery discharge, rendering it irrecoverable and thereby voiding the warranty.

Specifications and dimensions subject to change without notice.

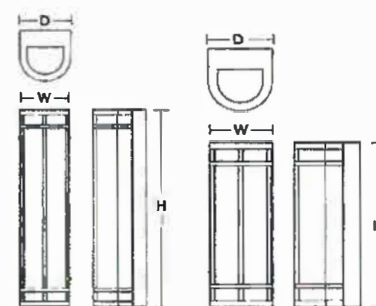

Ordering Information:

Black	Textured Grey	LED	Delivered Lumens	Adjustable CCT	H	W	D
CRNW0616LAJDBK	CRNW0616LAJDTG-PC	20W	1450	2700K/3000K/3500K/4000K/5000K	16"	5 1/2"	6"
CRNW0616LAJDBK-BB	CRNW0616LAJDTG-BB	20W	1450	2700K/3000K/3500K/4000K/5000K	16"	5 1/2"	6"
CRNW0616LAJDBK-PC	CRNW0616LAJDTG-PC	24W	1800	2700K/3000K/3500K/4000K/5000K	24"	5 1/2"	6"
CRNW0624LAJDBK	CRNW0624LAJDTG	24W	1800	2700K/3000K/3500K/4000K/5000K	24"	5 1/2"	6"
CRNW0624LAJDBK-BB	CRNW0624LAJDTG-BB	24W	1800	2700K/3000K/3500K/4000K/5000K	24"	5 1/2"	6"
CRNW0624LAJDBK-PC	CRNW0624LAJDTG-PC	24W	1800	2700K/3000K/3500K/4000K/5000K	24"	5 1/2"	6"



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Beverly LED Outdoor Sconce Bvyw Series

Features

This outdoor LED light is ideal for security and general lighting. Available in 1-light and 2-light. Provides lighting in residential, commercial, and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Die-cast aluminum construction. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black powder coated or Satin Nickel finish.

Diffuser

Clear acrylic diffuser(s)

Electrical

Input 120-277 VAC 60 HZ.
0-10V dimming (120-277V), TRIAC (120V).
Minimum starting temp -4° F / -20°C

LED

Fixture includes a LED modules capable of producing:
10W = 600 delivered lumens
20W = 1200 delivered lumens
Selectable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).
Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for wet locations.
Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

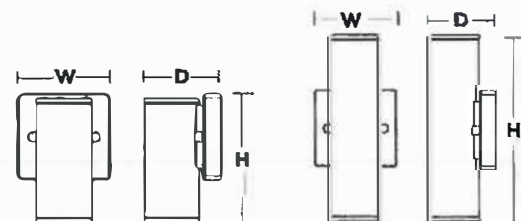

Black	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	H	W	D
Bvyw0406LAJDBK	Bvyw0406LAJDBN	10W	600	2700K/3000K/3500K/4000K/5000K	6-1/4"	4-1/8"	2-1/2" (1-Light)
Bvyw0410LAJDBK	Bvyw0410LAJDBN	20W	1200	2700K/3000K/3500K/4000K/5000K	10"	4-1/8"	4-1/2" (2-Light)



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Beverly LED Outdoor Sconce BVYW Series

Features

This outdoor LED light is ideal for security and general lighting. Available in 1-light and 2-light. Provides lighting in residential, commercial, and hospitality applications.

Fixture mounts to standard junction box (not included).

Construction

Die-cast aluminum construction. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

Black powder coated or Satin Nickel finish.

Diffuser

Clear acrylic diffuser(s)

Electrical

Input 120-277 VAC 60 HZ.

0-10V dimming (120-277V). TRIAC (120V).

Minimum starting temp -4° F / -20°C

LED

Fixture includes a LED modules capable of producing:

10W = 600 delivered lumens

20W = 1200 delivered lumens

Selectable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).

Rated for 50,000 Hrs., 90 CRI.

Certification



All fixtures are cETLus listed for wet locations.

Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

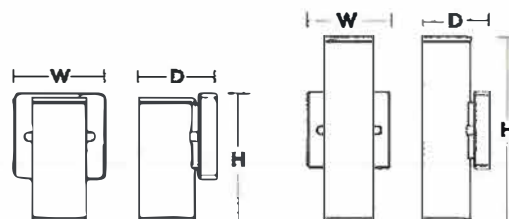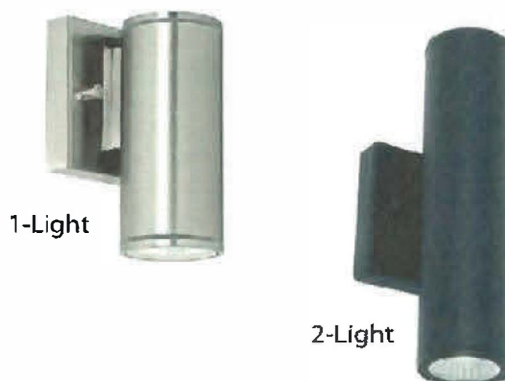

Black	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	H	W	D
BVYW0406LAJUDBK	BVYW0406LAJUDSN	10W	600	2700K/3000K/3500K/4000K/5000K	6-1/4"	4-1/8"	7-1/2" (1-light)
BVYW0406LAJUDBK	BVYW0406LAJUDSN	20W	1200	2700K/3000K/3500K/4000K/5000K	10"	4-1/8"	7-1/2" (2-light)

Project		Catalog #		Type	
Prepared by		Notes		Date	



Sure-Lites

INVM-10W-AD

Emergency Power for Lighting

10VA Output Micro Inverter

0-10V Auto Dimming to Max 50VA Load

Typical Applications

Office • Education • Healthcare • Hospitality • Retail • Industrial • Manufacturing

Interactive Menu

- Order Information page 2
- Product Specification page 2



Certified in California
Title 20 Appliance Database




Top Product Features

- Provides 90 minutes of 10VA emergency power to lighting fixtures
- 0-10V Auto dimming allows up to 50VA max dimmable load
- 10 VA max non-dimmable load
- Automatic 120VAC or 277VAC output power to driver or ballast means easy field install
- 120~277 VAC, 50/60 Hz Input
- Compatible with LED, fluorescent luminaires, Type B TLED and screw based lamps
- UL 924 and CSA 22.2, No. 141 listed for field or factory installation
- Remote mounting up to 250 feet
- Maintenance free lithium-ion battery

Dimensional and Mounting Details

15.34" x 2.25" x 1.16" | Product Weight: 3.45 lbs (1.56kg) | Mounting Center - 15.0"

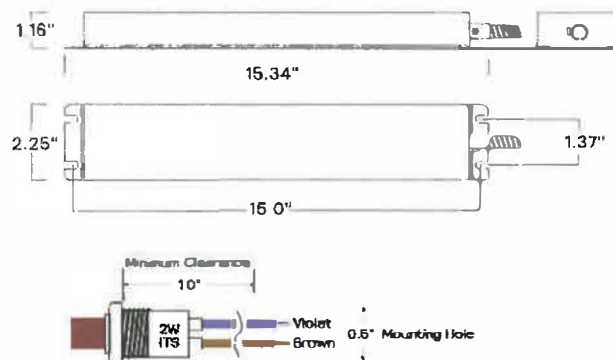

Project		Catalog #		Type	
Prepared by		Notes		Date	



Sure-Lites

SEL Emergency Light - High Power Optics

LED Emergency Light
 Up to 32, 58 or 78 Feet Egress Coverage
 Adjustable Optic
 Self-Diagnostics Options
 Remote Capacity Options

Typical Applications

Office • Education • Healthcare • Hospitality • Retail • Manufacturing

Interactive Menu

- Order Information page 2
- Photometric Data page 4
- Self Diagnostics page 6
- Product Warranty

Product Certification



Product Features




Top Product Features


- High powered LED heads for higher egress coverage
- Emergency egress coverage of 32 to 78 feet
- Total system coverage of 193 feet with remote capable versions
- Long life LED source with adjustable optics
- Sealed Nickel Cadmium battery
- Patented EZ hang and EZ Key features facilitate installation
- Multi-voltage input 120/240/277 VAC

Dimensional Details

SEL25/SEL25SD/SEL50/SEL50SD

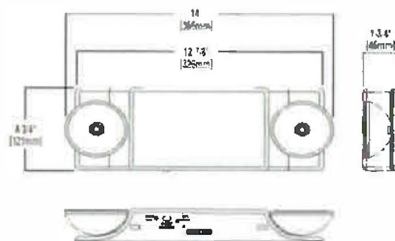

SEL25R10SD/SEL50R7SD/SEL60R4

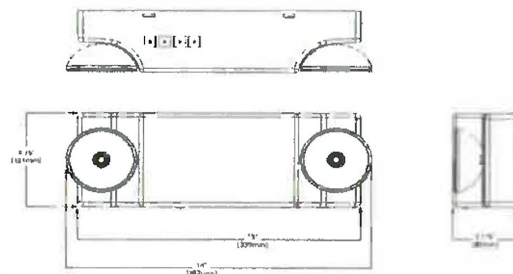

Job Name : Reverie Prototype
 Manufacturer : SURE
 Model Number : SEL50

Type :
EM

Sure-Lites

SEL25/SEL50/SEL60

Remote System Design Guidelines

SEL25/SEL50/SEL60

SEL Series Remote								
Watts Consumed	SRPA	Single Head Remotes			Double Head Remotes			
		SRP13/SRM13	SRP25/SRM25	SRP30/SRM30	SRP25D/SRM25D	SRP50D/SRM50D	SRP60D/SRM60D	
	3.5	1.25	2.5	4.1	2.5	5	8.2	
Catalog Number	Remote Watts Available	# of SRPA Remotes Fixture Will Power	# of SRP/SRM13 Remotes Fixture Will Power	# of SRP/SRM25 Remotes Fixture Will Power	# of SRP/SRM30 Remotes Fixture Will Power	# of SRP25D/SRM25D Remotes Fixture Will Power	# of SRP50D/SRM50D Remotes Fixture Will Power	# of SRP60D/SRM60D Remotes Fixture Will Power
SFL60R4	4	1	3	1	NA	1	NA	NA
SCL60R4SD	4	1	3	1	NA	1	NA	NA
SEL60R4BKSD	4	1	3	1	NA	1	NA	NA
SEL60R4BK	4	1	3	1	NA	1	NA	NA
SEL50R7SD	7	2	5	2	1	2	1	NA
SFL50R7BKSD	7	2	5	2	1	2	1	NA
SEL25R10SD	10	2	8	4	2	4	2	1
SEL25R10BKSD	10	2	8	4	2	4	2	1



SRP



SRPD



SRM



SRMD



SRPA WHITE



SRPA BLACK




SRPA BRONZE



SRPA SILVER

Project		Catalog #		Type	
Prepared by		Notes		Date	

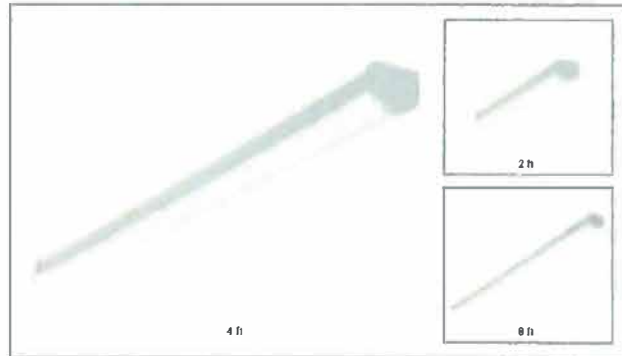

Metalux

SLSTP Lensed LED

Selectable CCT and Lumen LED Striplight

Typical Applications

Commercial • Industrial • Retail • Residential

Interactive Menu

- Order Information [page 2](#)
- Photometric Data [page 4](#)
- Sensor Coverage [page 5](#)
- Product Warranty

Product Certification



Product Features




Top Product Features

- External selectable switches provide easy, in field customization
- (3) color temperature and lumen select option provide application versatility
- Single frost lens (no breaks) provides clean, continuous lighting layout
- Up to 143 LPW and DLC compliant to enable rebates and energy savings
- Available in 8ft, 4ft and 2ft lengths, single and continuous mount capable
- UNV and 347V driver with 0-10V dimming, 10% standard
- Jbox cover, decorative endcap included to complete install.



Lumen/
Color Select
Switches

Dimensional and Mounting Details

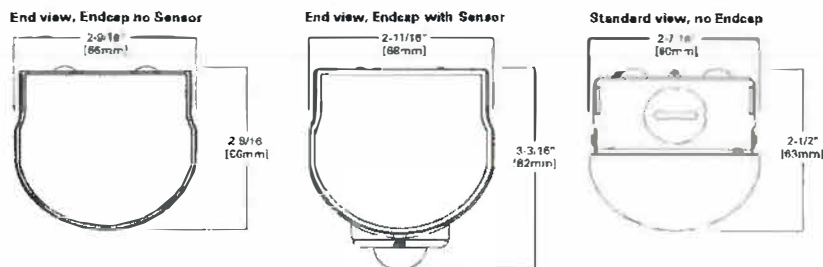


J-box Cover and Endcap included



Cover for junction box is shipped standard with fixture, along with hardware to secure cover to J-box.

[additional product diagrams](#)

Project		Catalog #		Type	
Prepared by		Notes		Date	

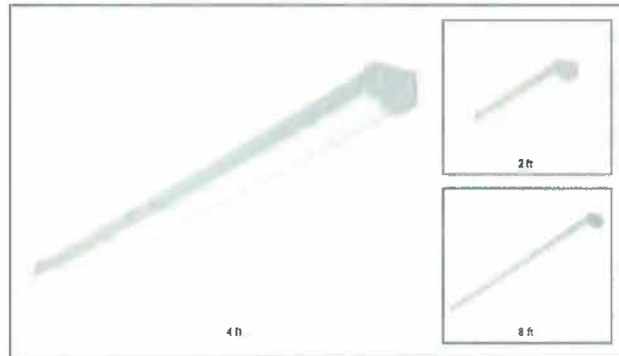

Metalux

SLSTP Lensed LED

Selectable CCT and Lumen LED Striplight

Typical Applications

Commercial • Industrial • Retail • Residential

Interactive Menu

- Order Information [page 2](#)
- Photometric Data [page 4](#)
- Sensor Coverage [page 5](#)
- Product Warranty

Product Certification



Product Features




Top Product Features

- External selectable switches provide easy, in field customization
- (3) color temperature and lumen select option provide application versatility
- Single frost lens (no breaks) provides clean, continuous lighting layout
- Up to 143 LPW and DLC compliant to enable rebates and energy savings
- Available in 8ft, 4ft and 2ft lengths, single and continuous mount capable
- UNV and 347V driver with 0-10V dimming, 10% standard
- Jbox cover, decorative endcap included to complete install.



Lumen/
Color Select
Switches

Dimensional and Mounting Details

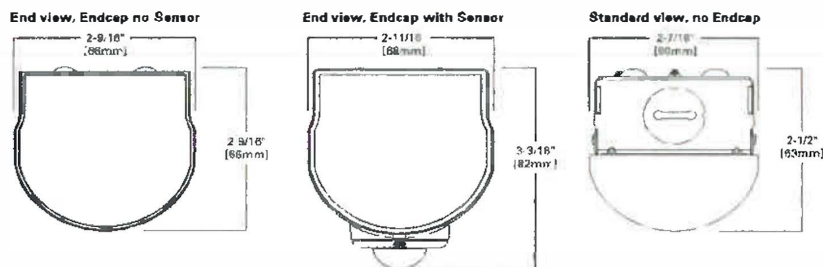

J-box Cover and Endcap included



Cover for junction box is shipped standard with fixture, along with hardware to secure cover to J-box.

[additional product diagrams](#)

Project		Catalog #		Type	
Prepared by		Notes		Date	



Metalux

APVT Select

4' and 8' Industrial Vaportite
CCT and Lumen Select

Typical Applications

• Industrial • Manufacturing • Gymnasium • Warehouse • Parking • Retail

Interactive Menu

- Order Information [page 2](#)
- Energy Data [page 2](#)
- Photometric Data [page 3](#)
- Product Warranty

Product Certification




Product Features



Top Product Features

- Lumen and CCT select option provide application versatility
- 2-piece easy access design: captive lens, electrical and housing enclosures
- Impact protection rating IK07 Lens and IK10 Housing
- Available in 4FT & 8FT lengths
- Stainless steel latches, single conduit hub, and mounting included
- Standard 0-10V dimming to 10% for more energy savings
- Emergency and sensor options available for commercial applications

Dimensional Details

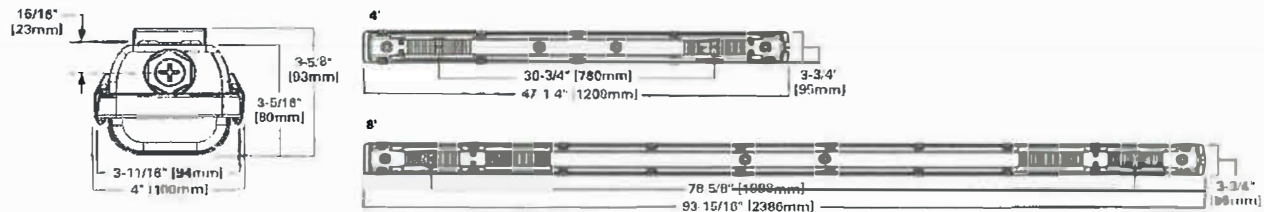

Project		Catalog #		Type	
Prepared by		Notes		Date	



Metalux

APVT Select

4' and 8' Industrial Vaportite
CCT and Lumen Select

Typical Applications

• Industrial • Manufacturing • Gymnasium • Warehouse • Parking • Retail

Interactive Menu

- Order Information [page 2](#)
- Energy Data [page 2](#)
- Photometric Data [page 3](#)
- Product Warranty

Product Certification




Product Features




Top Product Features

- Lumen and CCT select option provide application versatility
- 2-piece easy access design: captive lens, electrical and housing enclosures
- Impact protection rating IK07 Lens and IK10 Housing
- Available in 4FT & 8FT lengths
- Stainless steel latches, single conduit hub, and mounting included
- Standard 0-10V dimming to 10% for more energy savings
- Emergency and sensor options available for commercial applications

Dimensional Details

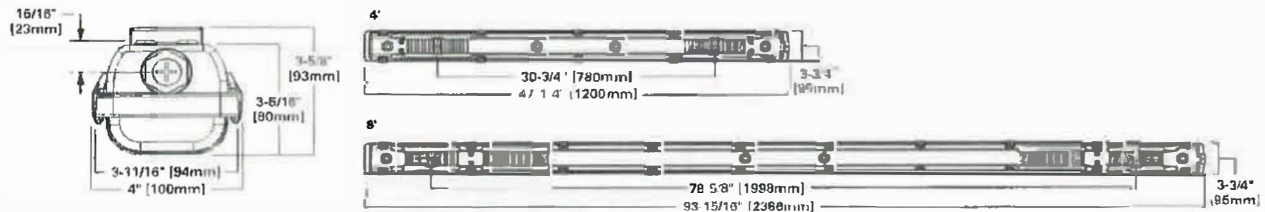

Project		Catalog #		Type	
Prepared by		Notes		Date	

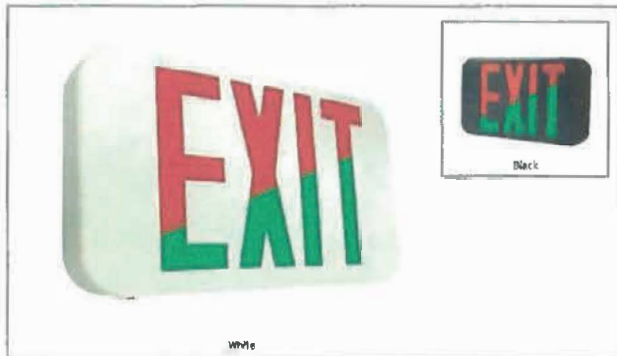

Sure-Lites

All-Pro APX RG Series

LED Exit Sign

Thermoplastic Housing with Selectable Red or Green Faces

AC only or Battery Backup Models

Typical Applications

Office • Education • Healthcare • Hospitality • Retail • Industrial • Manufacturing

Interactive Menu

- Order Information [page 2](#)
- Product Warranty

Product Certification




Product Features



Top Product Features

- Field selectable red or green LEDs and inserts for letter color selection
- Field selectable single or double faces with snap-out/snap-in chevrons
- Ceiling, wall or end mount
- Dual voltage input 120/277 VAC, 60Hz
- APX7 battery backup models have maintenance free nickel cadmium batteries
- Universal J-box mounting pattern
- High impact, 5VA flame resistant, UV resistant thermoplastic housing in white or black
- 90 minute run time for battery backup versions if power is lost

Dimensional and Mounting Details

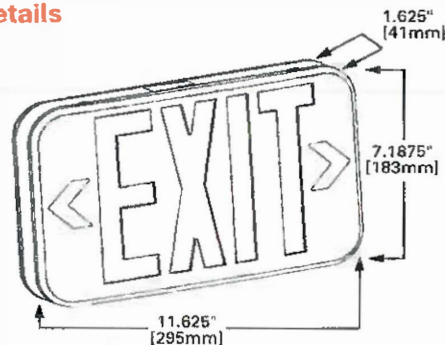

Project		Catalog #		Type	
Prepared by		Notes		Date	



HALO

HLCE Disk Light Bulk Packs

This LED Disk Light is a low profile design that mounts directly to the ceiling or junction box with a stylish look. Phase cut dimming down to 10% ⁽¹⁾

Typical Applications

Residential • Multifamily • Hospitality

Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 3](#)
- Photometric Data [page 4](#)
- Product Warranty
- Dimming Guide




Refer to ENERGY STAR® Certified Product List
Can be used to comply with California Title 24 high efficiency requirements.
Certified to California Appliance Efficiency Guidelines under JADA.

air

Top Product Features

- Dedicated 3000K, 4000K, 5000K; 90 CRI minimum
- Below the ceiling installation, no clips or plates needed
- Installs in most 3-1/2" and 4" standard and pancake junction boxes (see [Compatible Junction Boxes](#))
- Dimmable down to 10%
- Damp Location Listed

Dimensional and Mounting Details

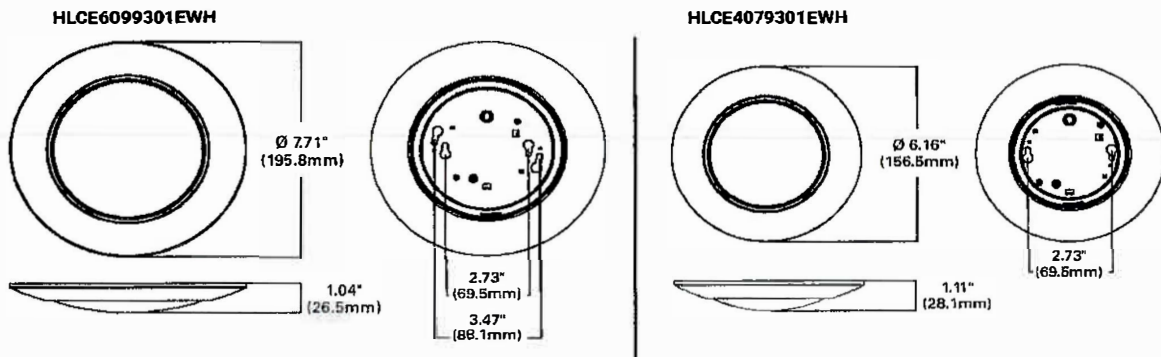

Review the product's Dimming Guide for approved compatible dimmers

T24 and RoHS are self-tested by Cooper Lighting Solutions. Not a third party certification.



PS5162321 page 1
Rev 1.0 2023-05-04

Job Name : Reverie Prototype
Manufacturer : VCBS
Model Number : GLP1041BS

Type :

P

VISUAL COMFORT & CO.

GLP1041BS: One Light Mini-Pendant



Collection: Miles

UPC #:785652149252

Finish: Brushed Nickel (BN)

Dimensions:

Diameter: 4.5" **Wire:** 120" (color: Clear Silver)
Width: 4.5" **Mounting Proc.:** Screw Collar - Stem
Height: 6.25" **Connection:** Mounted To Box

Bulbs:

1 - Medium A19 60.0w Max. 120v Not included

Features:

- This product may be mounted on a sloped ceiling
- Clear bulb(s) recommended for this fixture
- Easily converts to LED with optional replacement lamps
- Meets Title 24 energy efficiency standards
- Title 24 compliant if used with Joint Appendix (JA8) approved light bulbs listed in the California Energy Commission Appliance database.

Material List:

1 Body - Steel - Brushed Nickel
 3 12" Stem - Steel - Brushed Nickel
 1 8" Stem - Steel - Brushed Nickel

Safety Listing:

Safety Listed for Damp Locations

Shade / Glass / Diffuser Details:

Part	Material	Finish	Quantity	Item Number	Length	Width	Height	Diameter	Fitter Diameter	Shade Top Length	Shade Top Width	Shade Top Diameter
Shade	Glass	Clear	1				5.75	4.5				

Backplate / Canopy Details:

Type	Height / Length	Width	Depth	Diameter	Outlet Box Up	Outlet Box Down
Canopy	0.88			5.0		

Shipping Information:

Package Type	Product #	Quantity	UPC	Length	Width	Height	Cube	Weight	Frt. Class	UPS Ship
Individual	GLP1041BS	1	785652149252	13.39	6.5	8.07	0.41	3.5	0	Yes
Master Pack	GLP1041BS	0	10785652149259							No

Visual Comfort & Co. reserves the right to revise the design of components of any product due to parts availability or change in safety listing standards without assuming any obligation or liability to modify any products previously manufactured and without notice. This literature depicts a product design that is the sole and exclusive property of Visual Comfort & Co. In compliance with U.S. copyright and patent requirements, notification is hereby presented in this form that this literature, or the product it depicts, is not to be copied, altered or used in any manner without the express written consent of, or contrary to the best interests of Visual Comfort & Co.

VISUAL COMFORT & Co.

5DIC52PND-V1: Discus Classic 52 LED Ceiling Fan in Polished Nickel with Silver / American Walnut Reversible Blades and Light Kit



Collection: Discus Classic 52 LED

AC Motor

Finishing cap (blanking plate) sold separately - MC360BS

Compatible with MC93PN slope ceiling canopy kit.

20W LED Light Kit, 3000K, 1060 Lumens, 90+ CRI

UPC #: 014817591149

Finish: Polished Nickel (PN)

Blade Finish: Silver/American Walnut reversible blades

Blade Finish 2: Undefined

Dimensions:

Diameter:	52"
Weight:	17.4 lbs.
Number Of Speeds:	3
Reverse Switch:	Manual
Rev. Switch Location:	Top of Housing
Motor Size:	153 X 18
Diameter of Housing:	11.1
Uplight Included:	No
Light Kit Included:	Yes
Remote Included:	None
Remote Group(s):	

Bulbs:

1 - LED Integrated Array 20 0w Max 120v included

Features:

- This product may be mounted on a sloped ceiling
- This product is dimmable.
- This fan comes with a light kit.
- Dual finished blades included
- Flush mount hardware is included
- This advanced LED technology is carefully designed and selected to consist of the highest quality LED chipsets for superior performance and reliability.
- Fixture is operated with a pull chain
- This product complies with TSCA Title VI
- Integrated LED fixtures that meet the high efficacy LED standards set forth in Title 24 and are listed in the California Energy Commission Appliance database.

Material List:

- 1 Body - Steel - Polished Nickel
- 5 Blade - Plywood - Silver/American Walnut reversible blades

Safety Listing:

Safety Listed for Dry Locations

Instruction Sheets:

- English (5DIC52XXD-V1-CUL-ENG)
- French (5DIC52XXD-V1-CUL-CF)

Shade / Glass / Diffuser Details:

Part	Material	Finish	Quantity	Item Number	Length	Width	Height	Diameter	Filter Diameter	Shade Top Length	Shade Top Width	Shade Top Diameter
Shade	Glass	Matte Opal	1				3.12	9.0				

Backplate / Canopy Details:

Type	Height / Length	Width	Depth	Diameter	Outlet Box Up	Outlet Box Down
Canopy	2.25			5.12		

Blade Details:

Blade Group	Diameter	Included	RPM HI	CFM HI	Watts HI	Amps HI	RPM Med	CFM Med	Watts Med	Amps Med	RPM Low	CFM Low	Watts Low	Amps Low
	52	Yes	158.0	4758.0	65.1	0.54					62.0	1892.0	13.7	0.25
	52	Yes	158.0	4758.0	65.1	0.54					62.0	1892.0	13.7	0.25
	52	No	153.0	3217.0	65.1	0.54					62.0	971.0	13.7	0.25
	52	No	153.0	3217.0	65.1	0.54					62.0	971.0	13.7	0.25

Visual Comfort & Co. reserves the right to revise the design of components of any product due to parts availability or change in safety listing standards without assuming any obligation or liability to modify any products previously manufactured and without notice. This literature depicts a product design that is the sole and exclusive property of Visual Comfort & Co. In compliance with U.S. copyright and patent requirements, notification is hereby presented in this form that this literature, or the product it depicts, is not to be copied, altered or used in any manner without the express written consent of, or contrary to the best interests of Visual Comfort & Co.

Job Name : Reverie Prototype
Manufacturer : AFX
Model Number : PLMV3606LAJUDBK

Type :
VB



Palmer LED Vanity PLMV Series

Features

Contemporary style vanity with end caps and smooth white diffuser provided a simple and clean appearance. Fixture can be mounted horizontally or vertically to a standard junction box (not included).

Construction

The wiring channel is formed from 22-gauge steel and is provided with standard mounting holes and hardware. Power supply connections must be made inside a junction box (not included).

Finish

Housing is finished in lighting grade baked gloss white enamel paint. Satin Nickel or Black end caps.

Diffuser

Smooth white acrylic diffuser.

Electrical

Input 120-277 VAC / 60 Hz.
 0-10V dimming (120-277V), TRIAC (120V).
 Minimum starting temp -4° F / -20°C.

LED

Integrated LED modules capable of producing:
 25W = 1900 delivered lumens
 30W = 2200 delivered lumens
 40W = 3200 delivered lumens
 Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT)
 Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are cULus listed for indoor damp locations.
 ADA Compliant
 Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
 subject to change without notice.


LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Black



Satin Nickel



Ordering Information:

Black	Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	H	D
PLMV2406LAJUDBK	PLMV2406LAJUDSN	25W	1900	2700K/3000K/3500K/4000K/5000K	24"	5-1/2"	3-1/2"
PLMV3606LAJUDBK	PLMV3606LAJUDSN	30W	2200	2700K/3000K/3500K/4000K/5000K	36"	5-1/2"	3-1/2"
PLMV4806LAJUDBK	PLMV4806LAJUDSN	40W	3200	2700K/3000K/3500K/4000K/5000K	48"	5-1/2"	3-1/2"

Project		Catalog #		Type	
Prepared by		Notes		Date	



Interactive Menu

- Ordering Information [page 2](#)
- Product Specifications [page 2](#)
- Energy and Performance Data [page 3](#)

Quick Facts

- Available in 12W, 18W, 26, & 38W (900 - 3,100 lumens) models
- Available in 5000K or 4000K (CCT)
- Wall, inverted or pole mount
- Energy and maintenance savings up to 95% compared to HID

Lumark Crosstour Series

Wall Mount Luminaire


Product Certifications & Features




- Energy efficient illumination results in up to 177LPW
- Replaces 70W up to 450W HID equivalents
- Optional floodlighting kit converts from wall to floodlight, and pole mount

Dimensional Details


Crosstour Full Cut-off




Crosstour Escutcheon Plates

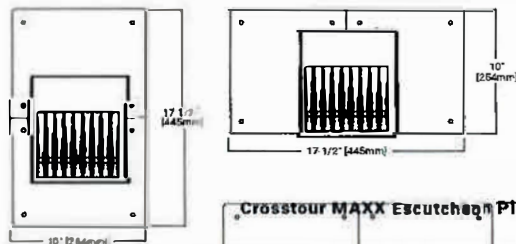

Crosstour MAXX Full Cut-off

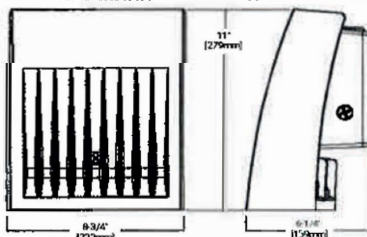

Crosstour MAXX Escutcheon Plate






plumbing fixtures

Pfirst Series™ Pull-Down Kitchen Faucet

- G529-PF2B Finish(B) ☐
- G529-PF2C Finish(C) ☐
- G529-PF2S Finish(S) ☐
- G529-PF2Y Finish(Y) ☐



Specifications

Features

- 1.8 GPM Flow Rate
- Optional Deckplate Available, Order 961-250*
- 3 Function Pull-Down Sprayer (Stream, Spray, and Pause)
- Pfaster Connect™
- Forward Handle Operation
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

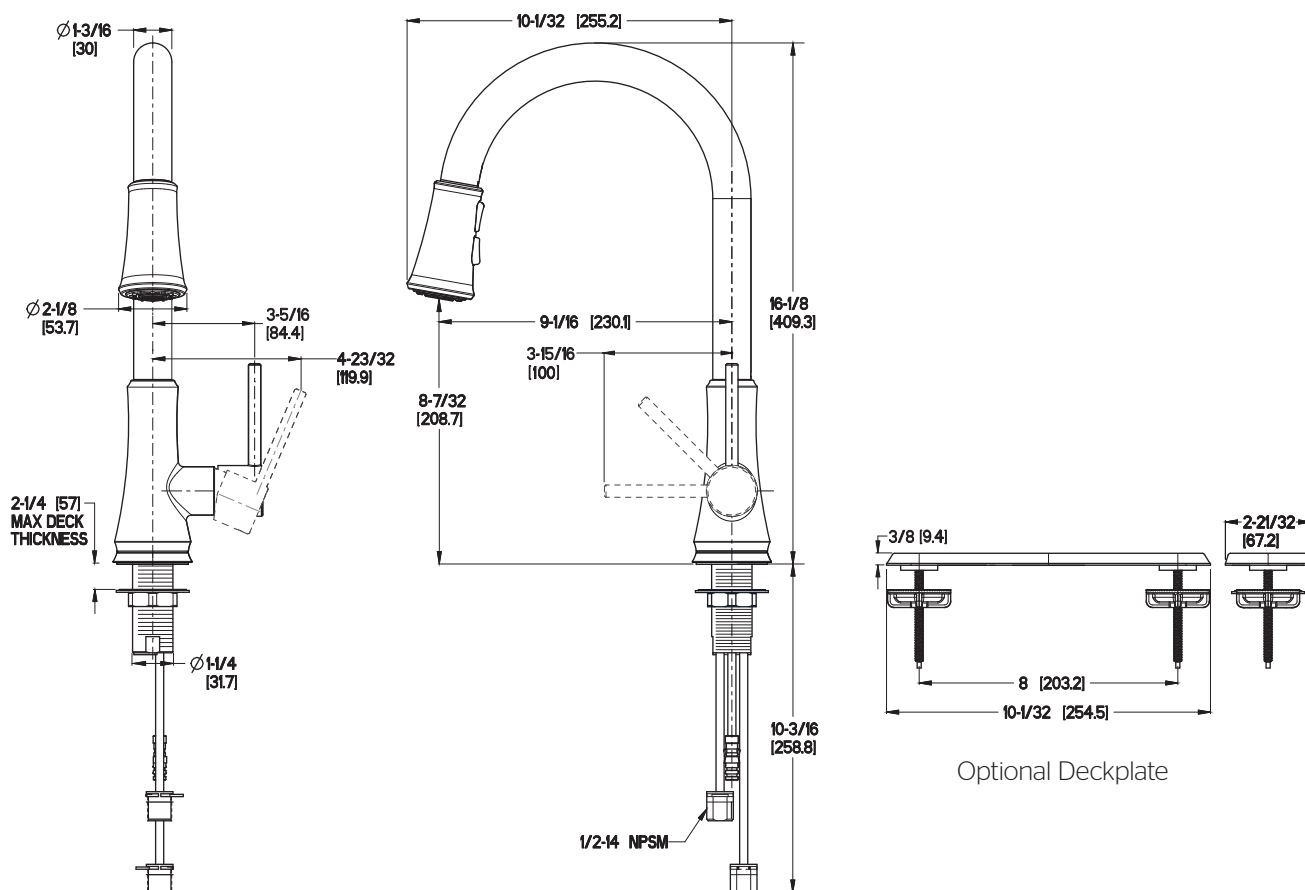


$\phi 1\text{-}3/8$ Min to $\phi 1\text{-}1/2$ Max. Deck Hole Openings

LG142-060B Finish(B) ☐

LG142-0600 Finish(C) ☐

LG142-060K Finish(K) ☐



Specifications

Features

- 1.2 GPM Flow Rate
- Optional 3-Hole Deckplate 961-217* (Order Separately)
- Push & Seal™ Drain Included
- Pre-Drilled and Plugged for Standard Pop-up (Order Pop-Up Separately)
- Pforever Seal™ Ceramic Disc Valve
- Temperature Limit Stop
- Limited Lifetime Warranty



- Pforever Seal™
- Push & Seal™ Pop-Up


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




Dimensions

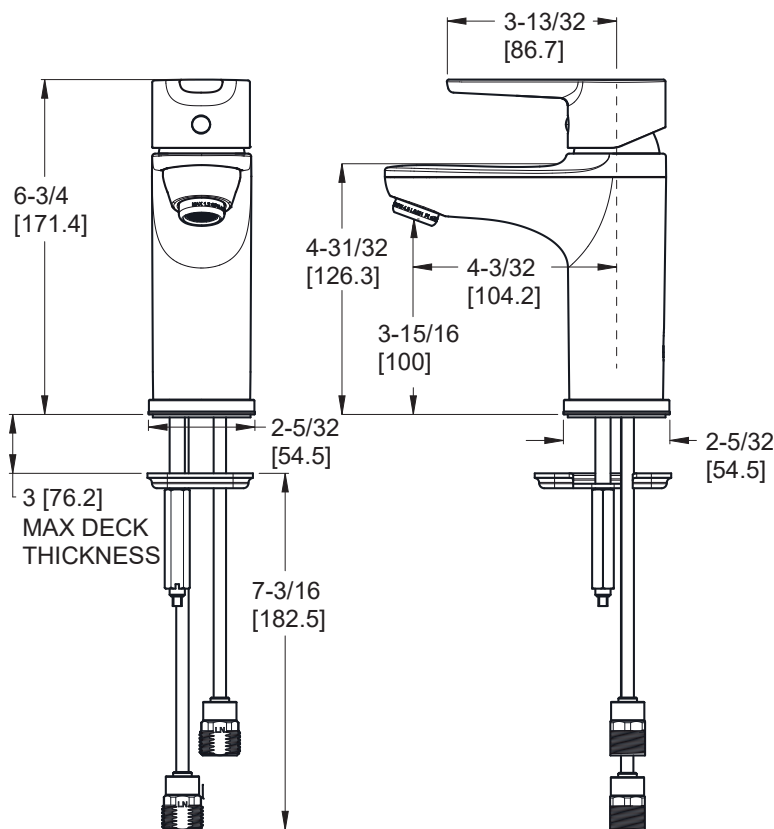


Ø1 Min to Ø1-1/2 Max. Deck Hole Openings


Optional Deck and Putty Plate

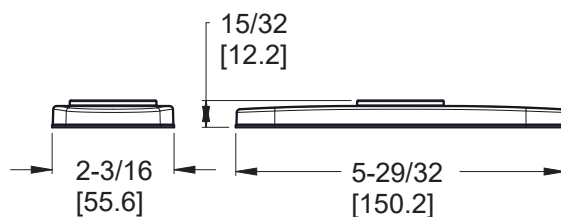

Push & Seal™

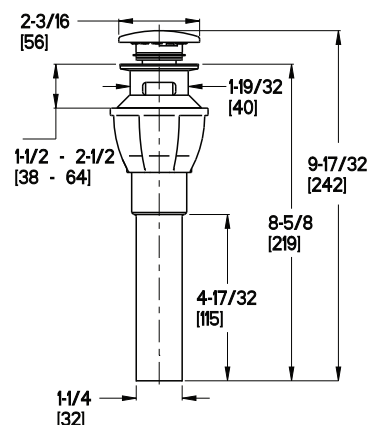

Pfirst Modern™ 5 Function Traditional Showerhead



- LJ15-070B Finish(B) ☐
- LJ15-070BG Finish(BG) ☐
- LJ15-070C Finish(C) ☐
- LJ15-070D Finish(D) ☐
- LJ15-070K Finish(K) ☐
- LJ15-070Y Finish(Y) ☐

Specifications

- Multi-Function Showerhead

Features

- Job Pack: Contains 12 Showerheads
- 1.75 GPM Flow Rate
- Multi-Function Showerhead
(5 Functions: Full Spray, Massage, Combo, Rinse, and Drench)
- Arm/ Flange Not Included
- Brass Ball Joint
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- CEC Certified/CALGreen Compliant




Dimensions

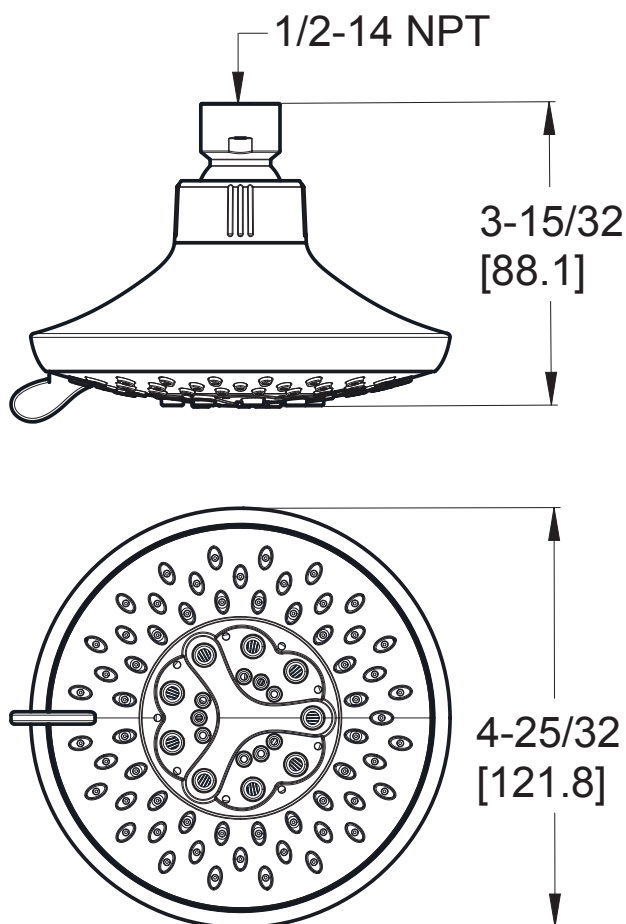

R89-O40B Finish(B) ☐
 R89-O400 Finish(C) ☐
 R89-O40K Finish(K) ☐

R89-O60B Finish(B) ☐
 R89-O600 Finish(C) ☐
 R89-O60K Finish(K) ☐
 R89-O70B Finish(B) ☐
 R89-O700 Finish(C) ☐
 R89-O70K Finish(K) ☐

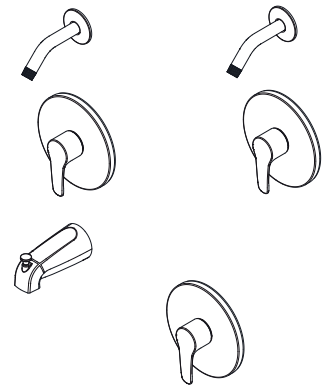

Specifications

Features

- Trim Only, Valve Not Included
- Trim Less Showerhead
- Requires OX8/JX8 Valve (Sold Separately)
- Tub & Shower (O70* Only)
- Shower Only (O60* Only)
- Valve Trim Only (O40* Only)
- Quick Trim Installation- Installs with No Tools or Exposed Screws
- Quick Connect Tub Spout (O70* Only)
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

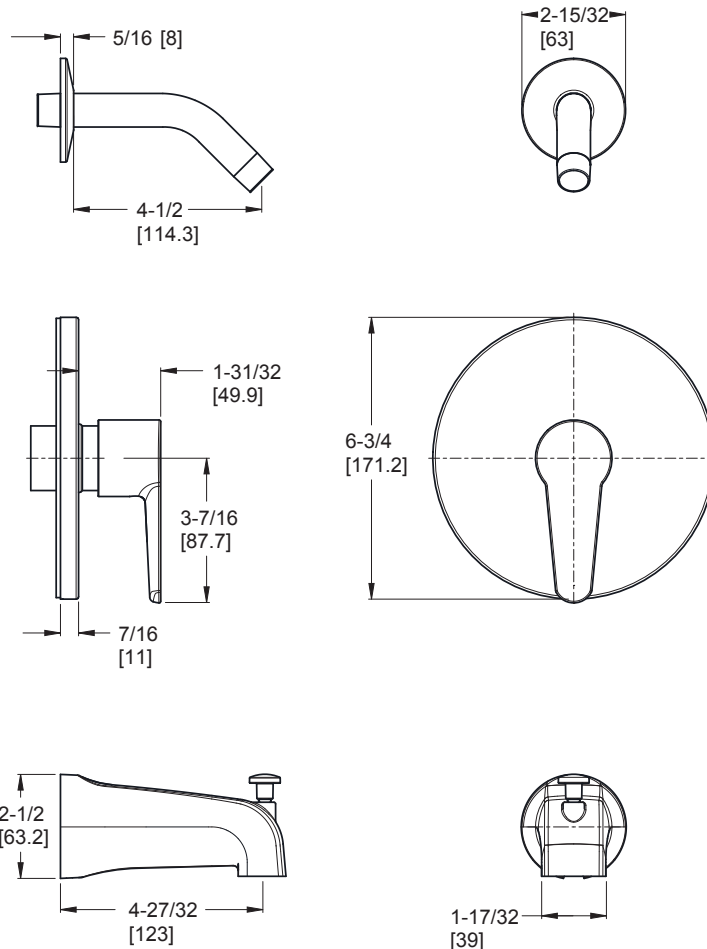

Jerritt

Two-Piece Elongated Bowl Toilet



Product Features

- 1.28 GPF
- Gravity-fed Siphon Jet Flush
- Vitreous China
- 15" Elongated Bowl
- Rough-in: 12"
- Flush Valve: 2"
- Trapway: 2" Fully Glazed
- Water Spot" 7" x 6"
- Front Mounted Trip Lever (Chrome/White Available)
- Sanitary bar on bowl for easy cleaning
- Quick connect, two-bolt tank-to bowl installation

Optional Accessories/Available Parts

- PF5112FLPK** Fill Valve Assembly
PF5112FVPK Flush Valve Assembly
PF5112TLCPPK Chrome Flush Lever

Codes and Certifications



- IAPMO/cUPC
- EPA WaterSense Certified
- ASME A112.19.2 / CAS B45.1
- MaP Rated 1000g



Available Colors: White (WH), Biscuit (BS)

Tank

PF5112HEWH	12" Rough-in Tank - White
PF5112HEBS	12" Rough-in Tank - Biscuit
PF5112NHEWH	12" Rough-in Tank with Chrome Lever
PF5112RHEWH	12" Rough-in Right Hand Tank
PF5112UHEWH	12" Rough-in Insulated Tank

Bowl

PF1401TWH	Elongated Bowl - 15" - White
PF1401TBS	Elongated Bowl - 15" - Biscuit

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a lifetime limited warranty on the vitreous china and a 5-year limited warranty on the fittings.

Visit ferguson.com for detailed warranty information.



Two-Piece Elongated Bowl Toilet



SINGLE UNDERMOUNT KITCHEN SINKS

SINK SOLUTIONS


Medium Single Undermount

CC-CS-USL2317x9

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Center drain



23" x 17-3/4" x 9"

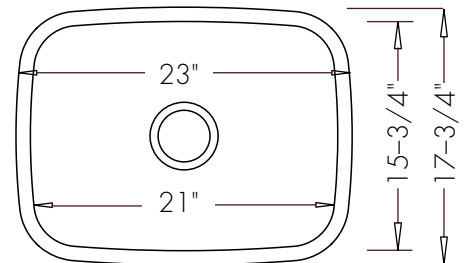


ADA Medium Single Undermount

CC-CS-USL2317x5.5

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Rear drain
- ADA compliant



23" x 17-3/4" x 5-1/2"

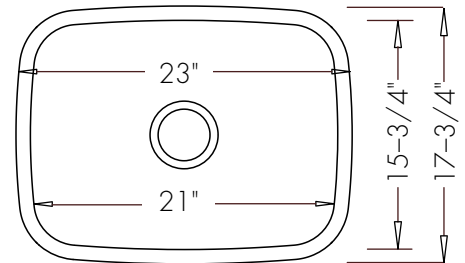

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETY

SINGLE UNDERMOUNT KITCHEN SINKS

SINK SOLUTIONS


Large Single Undermount

CC-CS-USL3018x9

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Center drain



30" x 18" x 9"

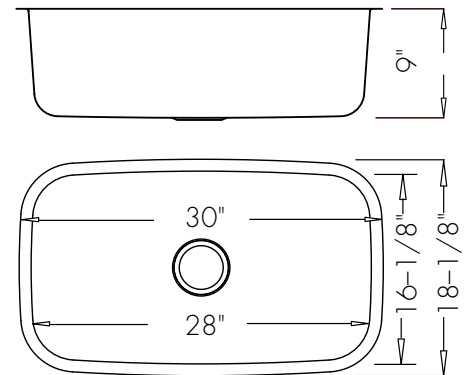


ADA Large Single Undermount

CC-CS-USL3018x5.5

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Rear drain
- ADA compliant



30" x 18" x 5-1/2"

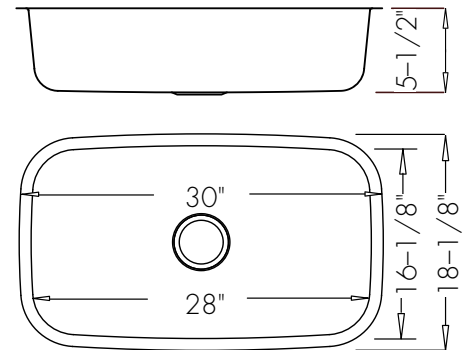

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETY

SINGLE UNDERMOUNT KITCHEN SINKS

SINK SOLUTIONS


Large Single Undermount

CC-CS-USL3218x9

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Rear drain



32-1/8" x 18" x 9"

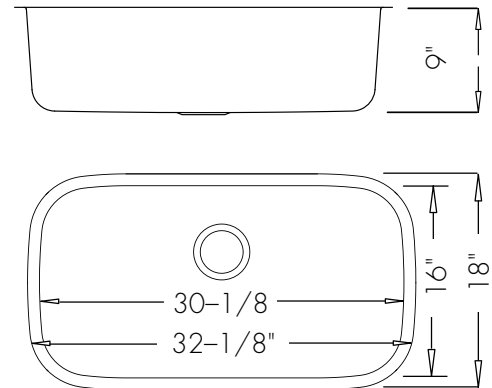


ADA Large Single Undermount

CC-CS-USL3218x5.5

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Rear drain
- ADA compliant



32-1/8" x 18" x 5-1/2"

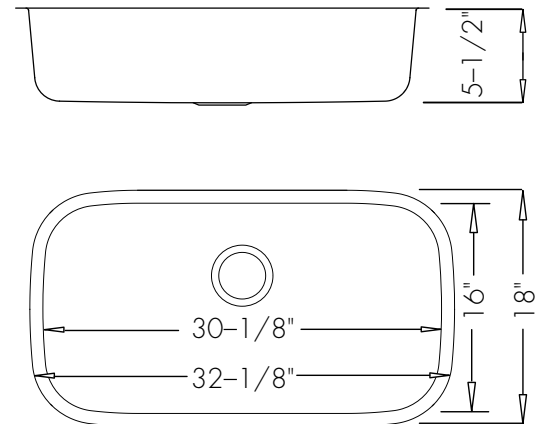

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETY

SINGLE UNDERMOUNT KITCHEN SINKS

SINK SOLUTIONS


Large Square Single Undermount

CC-CS-USQ3118x9

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Center drain



31-3/4" x 18-1/2" x 9"

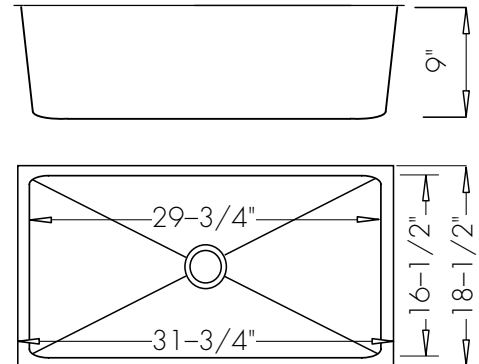


ADA Large Square Single Undermount

CC-CS-USQ3118x5.5

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- Rear drain
- ADA compliant



31-3/4" x 18-1/2" x 5-1/2"

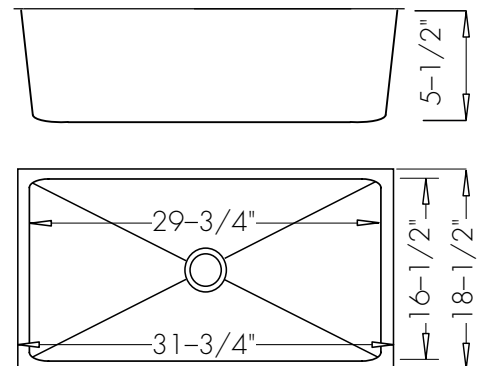

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETRY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETRY

DOUBLE UNDERMOUNT KITCHEN SINKS

SINK SOLUTIONS



Large Double Undermount

CC-CS-UDL3218x9

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners



32-1/8" x 18" x 9"

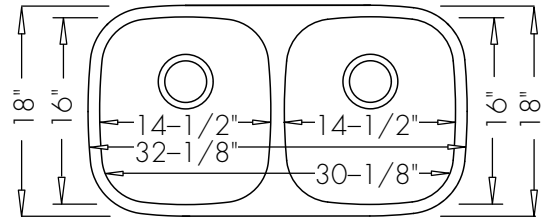



ADA Large Double Undermount

CC-CS-UDL3218x5.5

- 304-grade, 18 ga. surgical stainless steel
- Rounded inside corners
- ADA compliant



32-1/8" x 18" x 5-1/2"

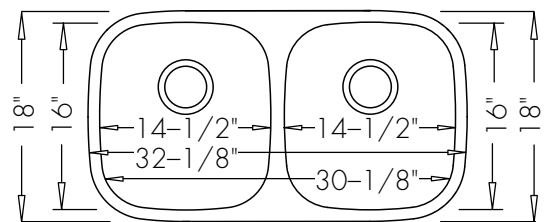

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETRY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETRY

SINGLE DROP-IN KITCHEN SINKS

SINK SOLUTIONS



Large Single Drop-In

CC-CS-DS3322x9

- 304-grade, 20 ga. surgical stainless steel
- Rounded inside corners
- Includes mounting clips and cut-out template



33" x 22" x 9"

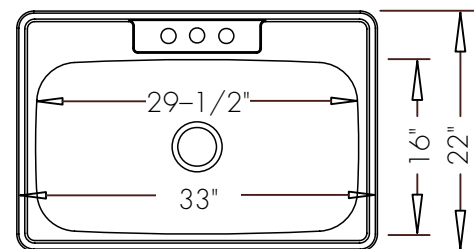


Medium Single Drop-In

CC-CS-DS2522x8

- 304-grade, 20 ga. surgical stainless steel
- Rounded inside corners
- Includes mounting clips and cut-out template



25" x 22" x 8"

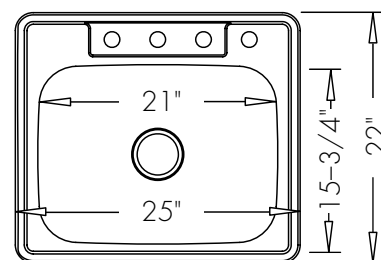


ADA Medium Single Drop-In

CC-CS-DS2522x6

- 304-grade, 20 ga. surgical stainless steel
- Rounded inside corners
- Includes mounting clips and cut-out template
- ADA compliant



25" x 22" x 6"

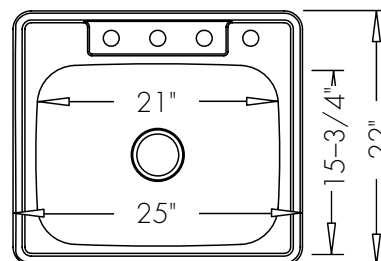

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETRY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETRY

DOUBLE DROP-IN KITCHEN SINKS

SINK SOLUTIONS


Large Double Drop-In

CC-CS-DD3322x8

- 304-grade, 20 ga. surgical stainless steel
- Rounded inside corners
- Includes mounting clips and cut-out template



33" x 22" x 8"

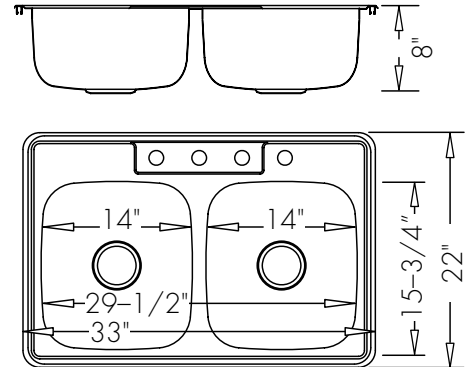


ADA Large Double Drop-In

CC-CS-DD3322x6

- 304-grade, 20 ga. surgical stainless steel
- Rounded inside corners
- Includes mounting clips and cut-out template
- ADA compliant



33" x 22" x 6"

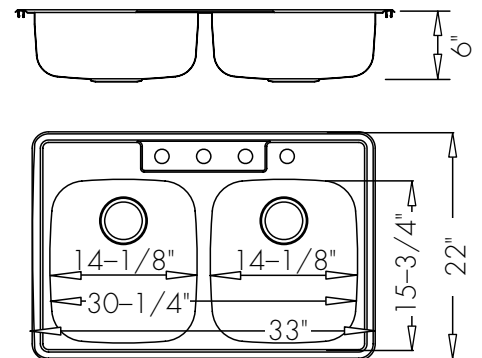

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETRY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETRY

UNDERMOUNT VANITY SINKS

SINK SOLUTIONS


Vanity Oval Undermount

CC-CS-VO1915x8

- Vanity oval under mount
- Crafted from porcelain
- Includes cut-out template



19-3/8" x 15-3/4"
Outer Depth: 8-1/4"
Inner Depth: 6-1/2"

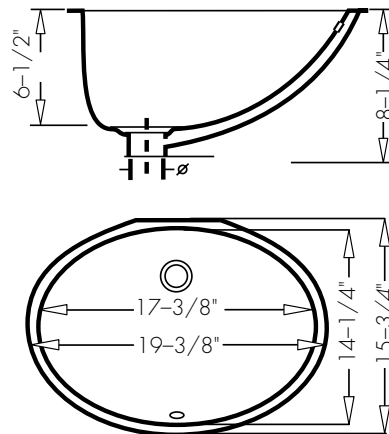


ADA Vanity Oval Undermount

CC-CS-VO1916x5.5

- Vanity oval under mount
- Crafted from porcelain
- Includes cut-out template
- ADA compliant



19" x 16"
Outer Depth: 5-1/2"
Inner Depth: 3-1/2"

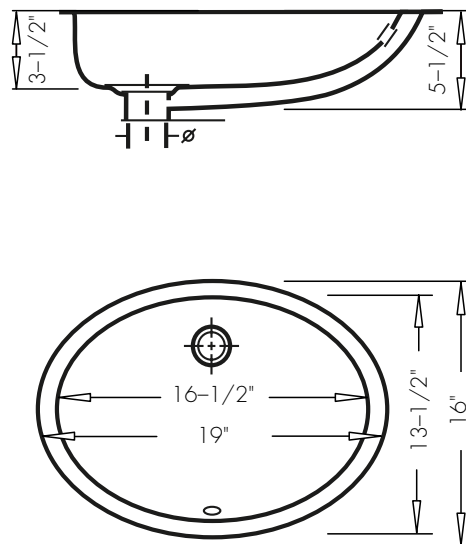

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETY

UNDERMOUNT VANITY SINKS

SINK SOLUTIONS



Vanity Square Undermount

CC-CS-VR2114x8

- Crafted from porcelain
- Includes cut-out template



21" x 14-1/2"
Outer Depth: 8-1/2"
Inner Depth: 6-1/4"

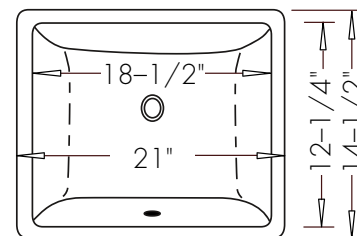



ADA Vanity Square Undermount

CC-CS-VR2314x7

- Crafted from porcelain
- Includes cut-out template
- ADA compliant



23-1/2" x 14-1/2"
Outer Depth: 7-3/4"
Inner Depth: 5-1/2"

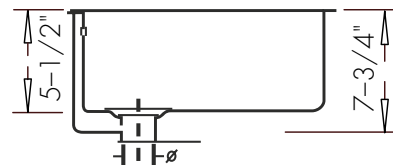

www.leedo.com 866.GO.LEEDO

© LEEDO CABINETY | JAN 2025

Printed in the United States of America

NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETY

DROP-IN VANITY SINKS

SINK SOLUTIONS


Vanity Oval Drop-In

CC-CS-VDO2218x8

- Crafted from porcelain
- Includes cut-out template



22-3/8" x 18-1/4"
Outer Depth: 8-1/2"
Inner Depth: 6"

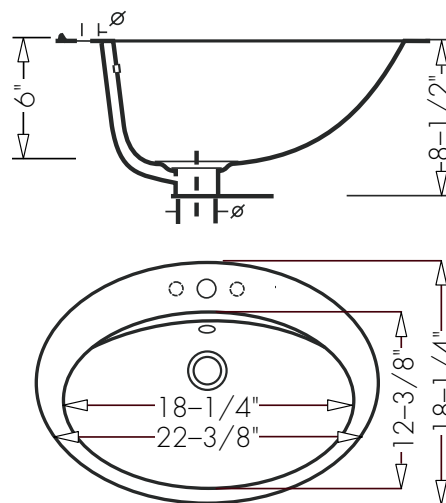


Vanity Square Drop-In

CC-CS-VDR2118x6

- Crafted from porcelain
- Includes cut-out template



21-1/4" x 18"
Outer Depth: 6-3/4"
Inner Depth: 5"

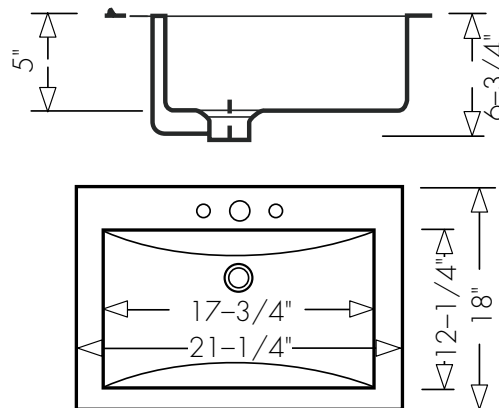

www.leedo.com 866.GO.LEEDO


© LEEDO CABINETRY | JAN 2025

Printed in the United States of America


NOTE: All photography and illustrations used in this literature sheet should be used for inspiration purposes only. The appearance of actual colors or textures may vary due to the printed publication process. Customers are urged to view an actual sample for a realistic representation of color tones.



Leedo
CABINETRY

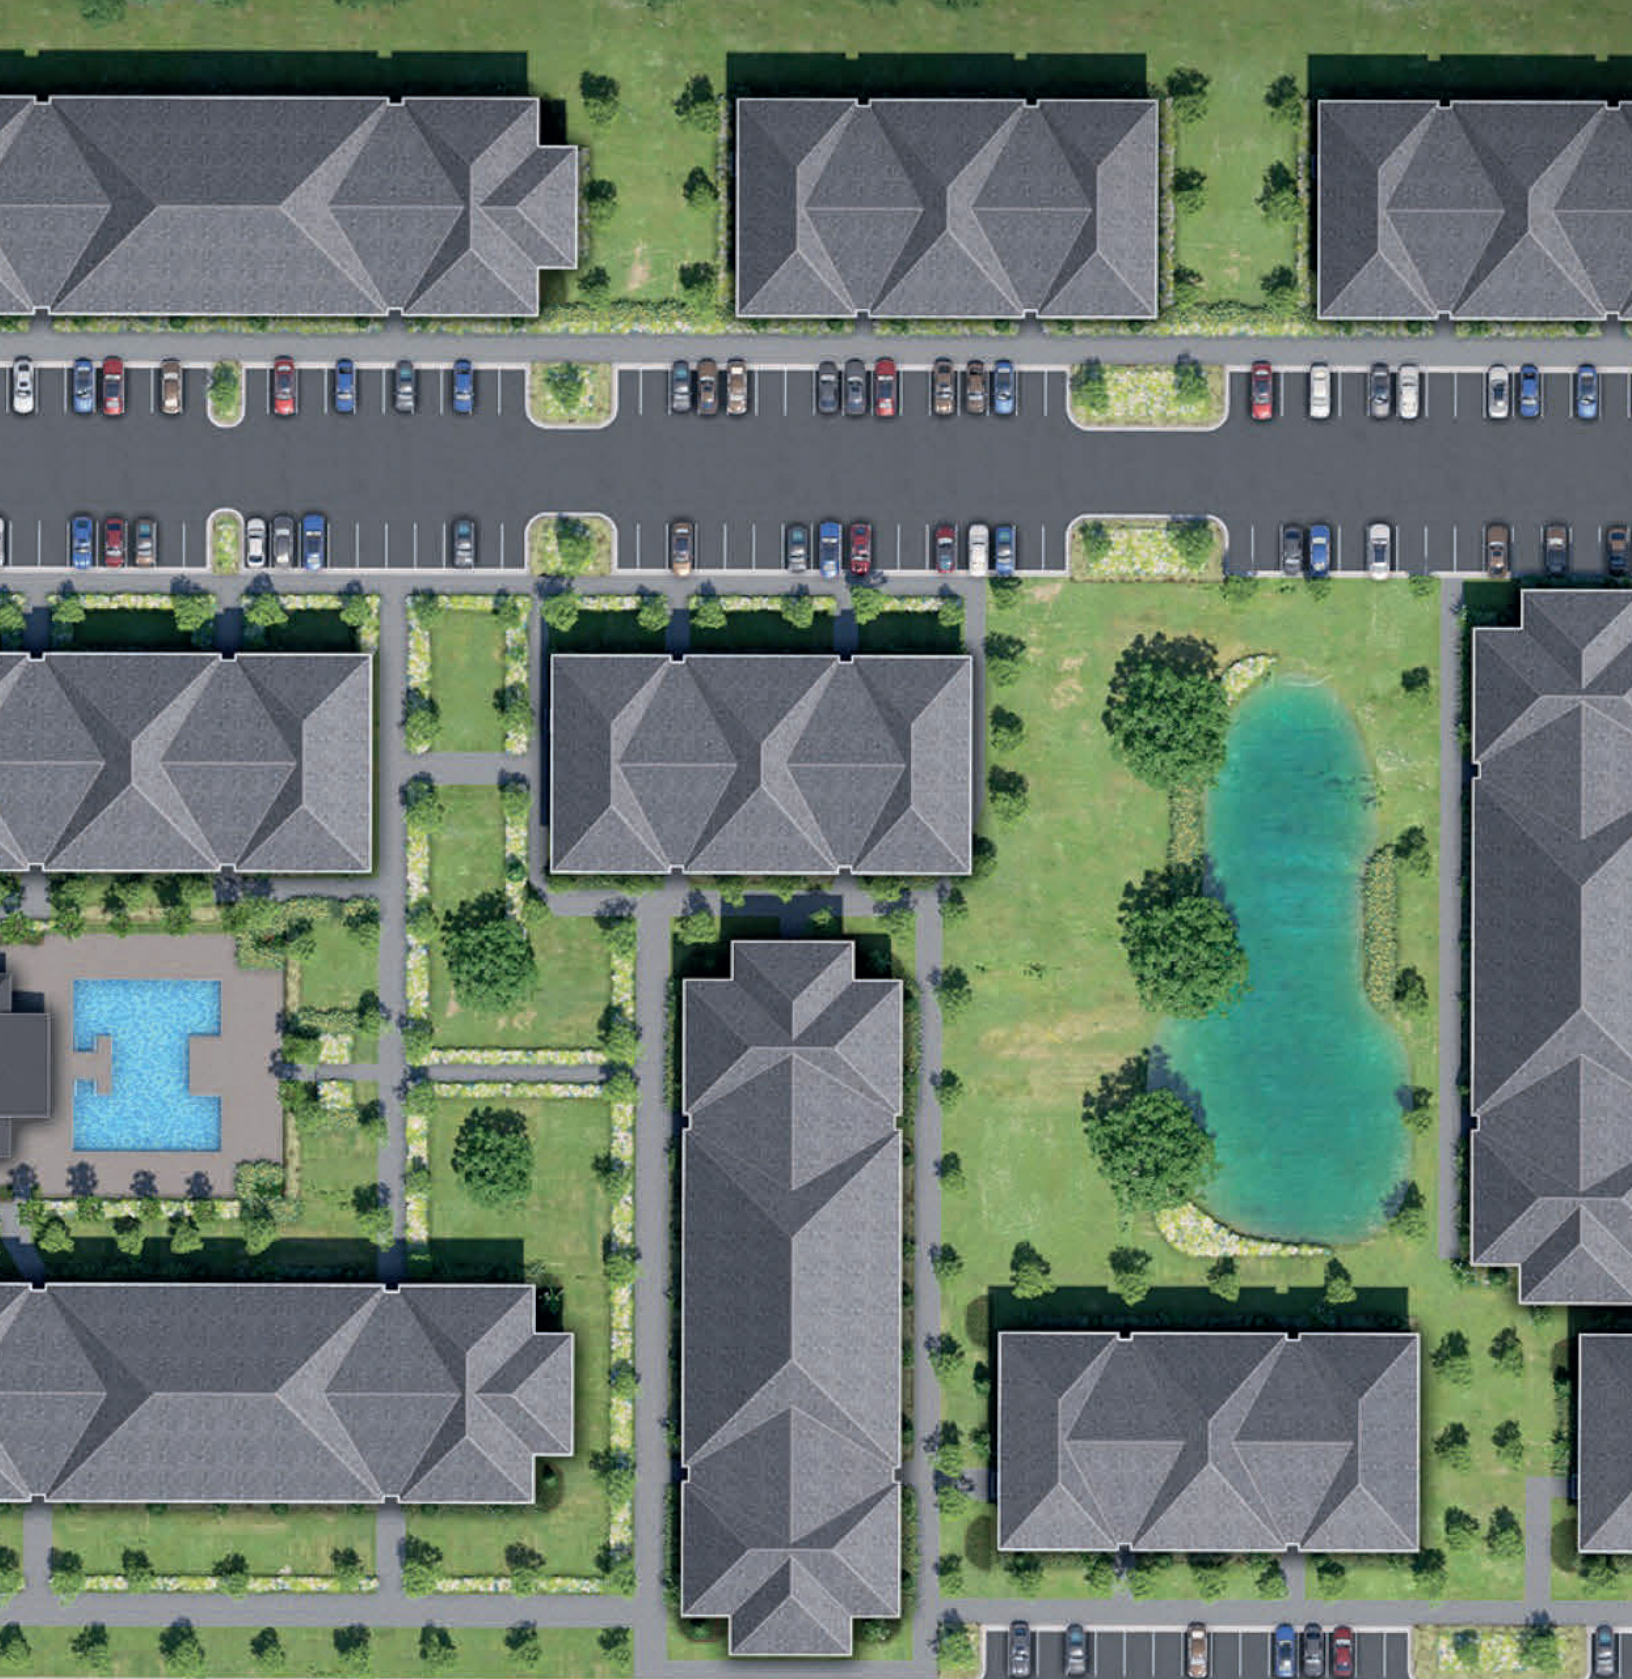

HVAC

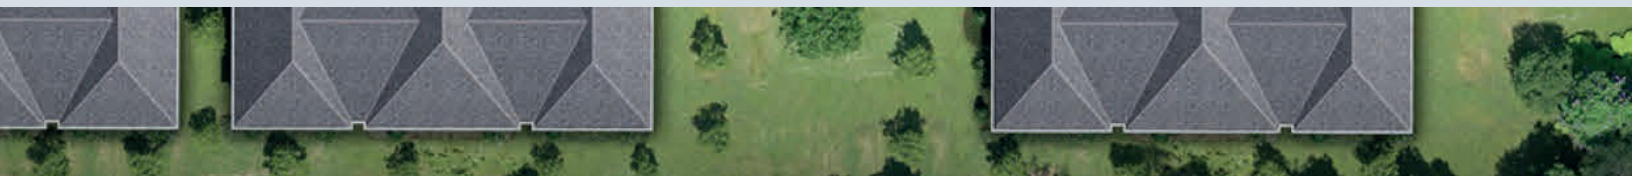



engineered for life™

Air Handlers
RF2TY



Endeavor® Line Air Handlers



RF2TY

Constant Torque Motor (ECM)

Two-Stage Airflow


Expansion Device: Thermal Expansion Valve (TXV)

Efficiencies: 13.4 to 16.0 SEER2

Refrigerant Type: R-454B




Unit Dimensions

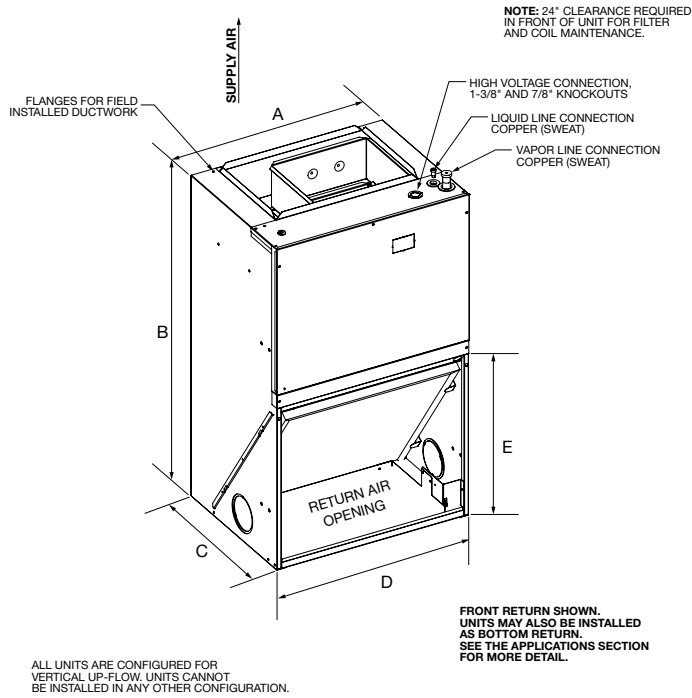



ST-A1258-02-01

Return Air Opening Dimensions



Model Cabinet Size	Return Air Opening Width (Inches)	Return Air Opening Depth/Length (Inches)
21	19 ³ / ₈	19 ³ / ₄
24	22 ⁷ / ₈	19 ³ / ₄

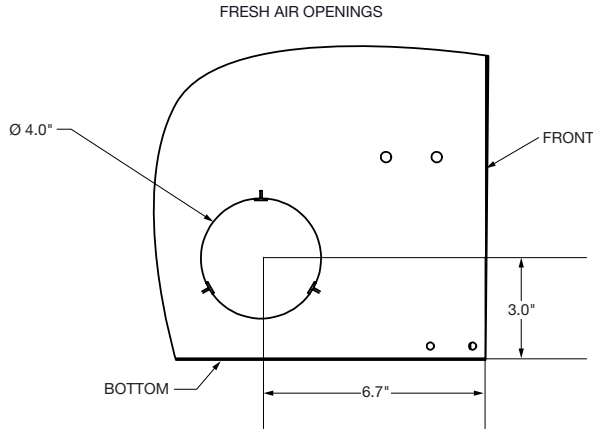

ST-A1244-01-01

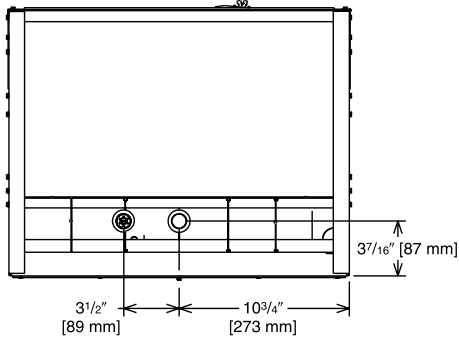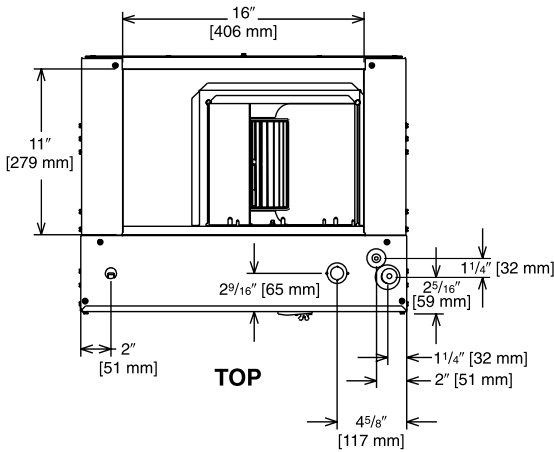

1 1/2 & 2 TON [5.28 & 7.03 kW] MODELS

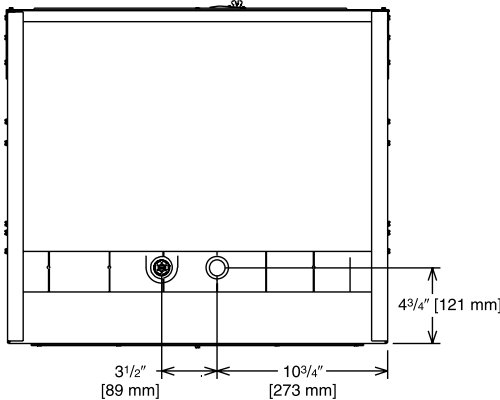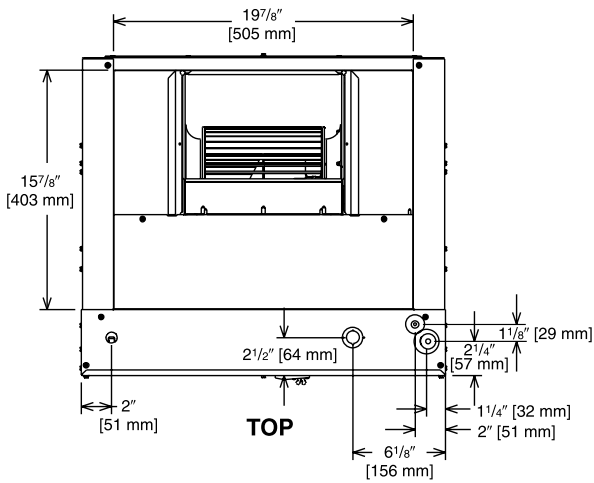


2 1/2 & 3 TON [8.79 & 10.6 kW] MODELS

Illustration
ST-A1358-03-00


16.0 Accessories-Kits-Parts

- **Drain Pan Over Flow Switch RXHK-A01** is used to detect condensate drain blockage and will shut down the outdoor unit in order to prevent structural damage to the surrounding structures of the air handler.

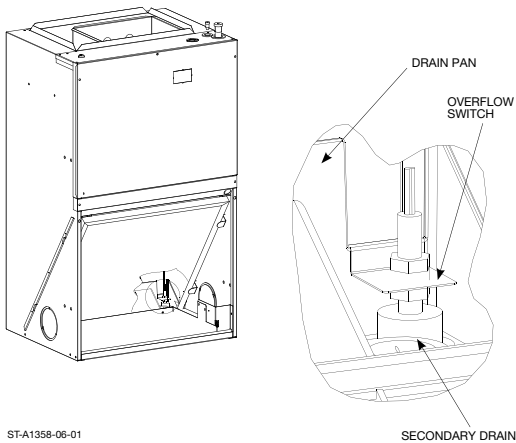


- **Bottom Return Conversion Kit RXHK-** is used to divert the return air from the factory standard front return to a bottom return.

Accessory Number	Indoor Unit
RXHK-B01	RF1P-FR18
	RF1P-FR24
	RF1T-FR24
RXHK-B02	RF1P-FR30
	RF1P-FR36
	RF1T-FR36

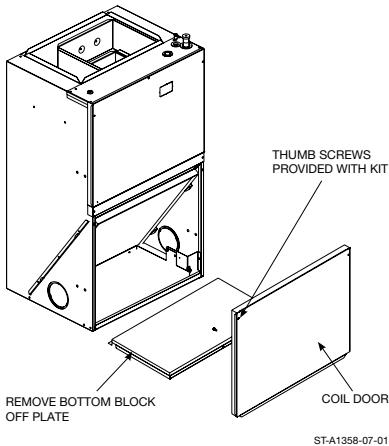


- **Louvered Cabinet Grill RXHK-** is used as decorative grill which covers the return air opening of the front return air handler.

Accessory Number	Indoor Unit
RXHK-C01	RF1P-FR18
	RF1P-FR24
	RF1T-FR24
RXHK-C02	RF1P-FR30
	RF1P-FR36
	RF1T-FR36

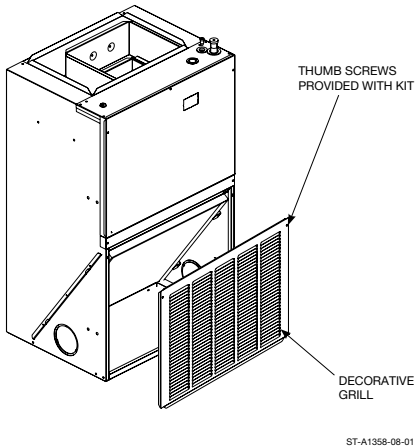

- **Decorative Wall Grill RXHK-D01 or RXHK-D02** is used in applications where the air handler is installed in a closet or interior wall and allows adequate return air back to the unit. Please refer to RXHD-D01/RXHK-D02 installation instructions for complete dimensional information when selecting a decorative wall grill.

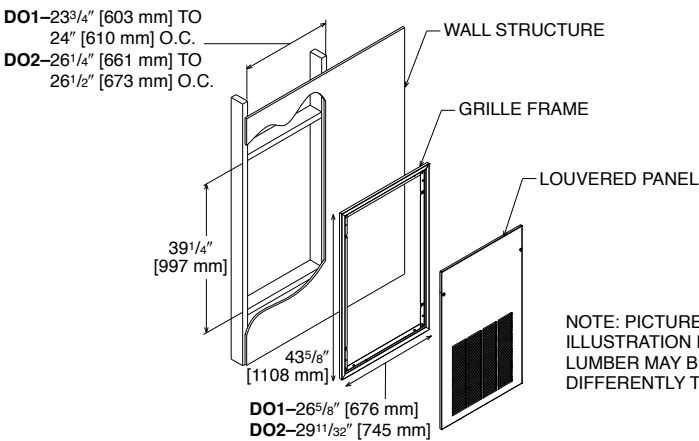

[] Designates Metric Conversions



MAINLINE PERFORMANCE[®] MPA14 AIR CONDITIONERS



Features

- Outdoor air conditioner designed for ground level or rooftop installations. These units offer comfort and dependability for single, multi-family and light commercial applications.
- Painted louvered steel cabinet
- Easily accessible control box
- Condenser coils constructed with copper tubing and enhanced aluminum fins
- Grille/Motor mount for quiet fan operation

MPA14


14 SEER/11.5 EER

Nominal Sizes 1.5-5 Ton [5.28 TO 17.6 KW]

Manufactured for

Mainline[®]


HVACmainline.com



"Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet Energy Star. Ask your Contractor for details or visit www.energystar.gov."

Unit Dimensions


MODEL NUMBER	OPERATING						SHIPPING					
	H (Height)		L (Length)		W (Width)		H (Height)		L (Length)		W (Width)	
	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
MPA1418A	24.25	615	23.63	600	23.63	600	24.25	615	24.75	628	24.75	628
MPA1424B	32.25	819	23.63	600	23.63	600	32.50	825	24.75	628	24.75	628
MPA1424C	24.25	615	27.63	701	27.63	701	24.25	615	28.75	730	28.75	730
MPA1430B	24.25	615	27.63	701	27.63	701	24.25	615	28.75	730	28.75	730
MPA1436B	32.25	819	27.63	701	27.63	701	32.50	825	28.75	730	28.75	730
MPA1436C	35.38	899	31.63	803	31.63	803	35.63	905	32.75	832	32.75	832
MPA1442C	32.25	819	27.63	701	27.63	701	32.50	825	28.75	730	28.75	730
MPA1448B	35.38	899	31.63	803	31.63	803	35.56	903	33.94	862	33.94	862
MPA1460A	35.38	899	31.63	803	31.63	803	35.56	903	33.94	862	33.94	862

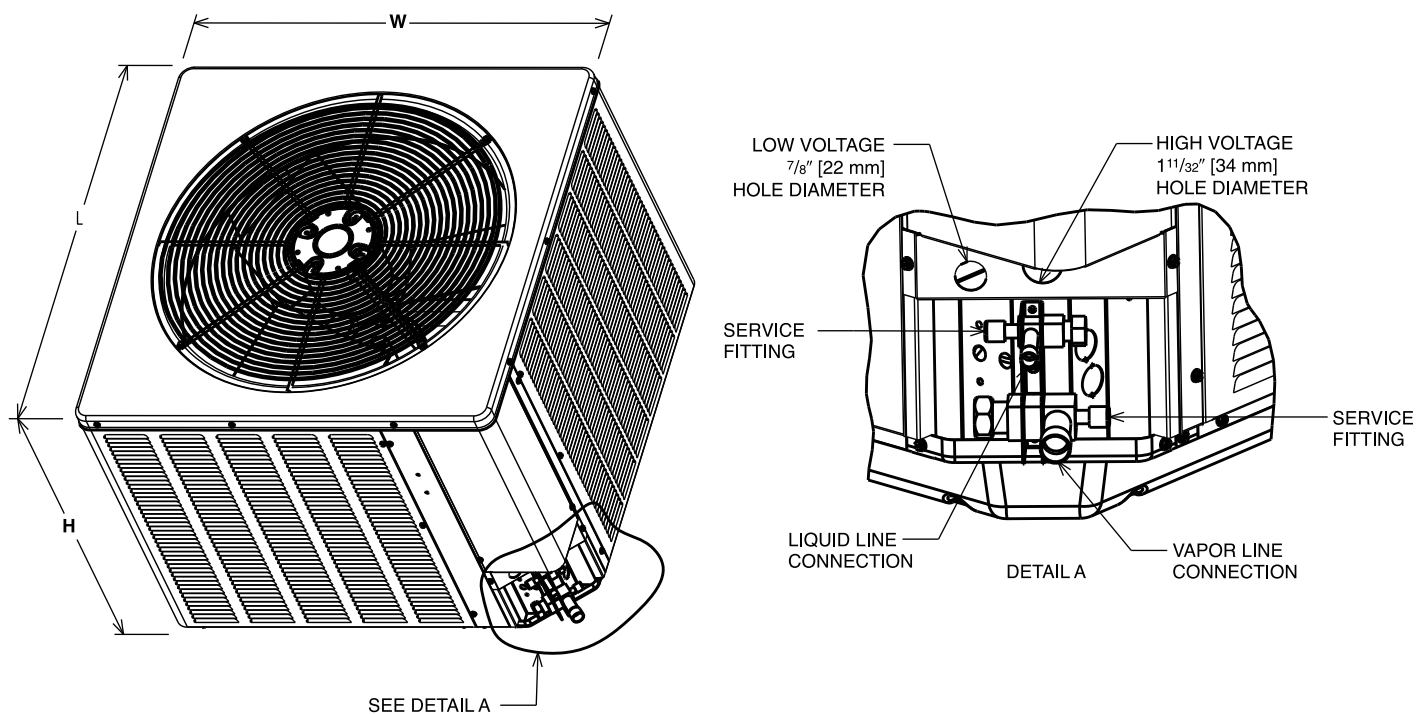

NOTE: Illustrations show the deep drawn basepan.



elevators

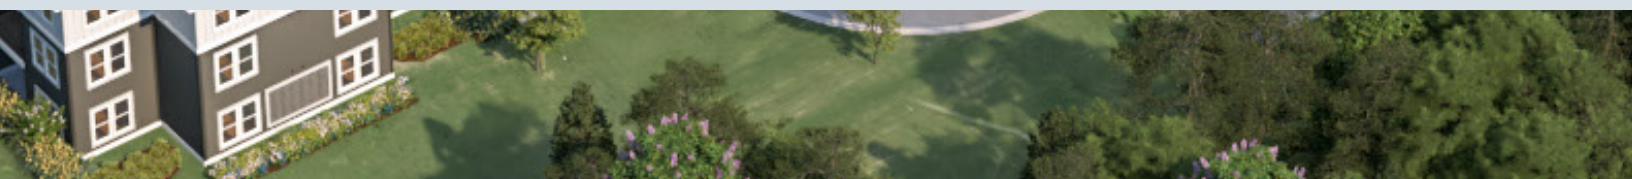

Reverie CFE Prototype

Schindler 3300



Schindler

Main Data

Group	A
Unit	01
Application	3300 MRL
Capacity	3500 lbs General Purpose - Class A
Speed	150 fpm
Travel	32 Ft 0.63 In
Counterweight Location	Side
Stops	Total Stops 4 (4 Front 0 Rear)
Power Supply	480 Volts 60 Hz 3 Phase
Sprinklers in Hoistway	No
Front Door Type	Two Speed Right Hand Opening
Opening Size	3 Ft 6 In wide x 7 Ft 0 In high
Cab Height	7 Ft 9 In
Cab Type	3300 Cab
Pit Depth	5 Ft 0 In
Clear Overhead	12 Ft 7 In
Inside Cab Dims (w x d)	6 Ft 9.31 In x 5 Ft 6.88 In
Hoistway Dims (w x d)	8 Ft 6.00 In x 6 Ft 11.00 In
Seismic Equipment	No
ANSI Year	2019
IBC Year	2018
NFPA Code Year	2016
Stretcher Car Compliant	Yes

Cab

Cab Base	Skirting Flush
Base, Frieze, Reveal	Aluminum
Front, Return, Transom	#4 Stainless Steel
Canopy	Schindler
Cab Threshold	Aluminum
Threshold Extensions	Yes
Platform Recess	0.38
Protective Pads / Source	1 Set(s) / Schindler
Cab Finished Floor	Carpet By Others

Entrances

Entrance Sill & Qty	4 Aluminum
3D Door Detection	
Emergency Escutcheons	

Fixtures

1 Main COP	
(1) Car Lanterns	
Certificate Frame	
Hall Fixture Type	Std-Wall Mounted
Hall Fixture Push Button Finish	Sandblasted Stainless Steel 304
Hall Fixture Faceplate Finish	Brushed Stainless Steel 304
(1) Separate FER Switch	

Options & Miscellaneous

- Pre-Paid Maintenance (PPM): 12 Months, 8 Hours Callback
- Visual Comm. Device per IBC 2018/A17.1-2019
- Top Exit Lock
- Car Card Reader Provisions: Card Reader by Others
- FER Door Operator
- T127 Rails
- Keyed Switch Emergency Stop Switch
- Top Exit Switch
- ADA Compliant Phone
- Sliding Guide Shoes
- Automatic Evacuation
- (2) Hoistway Access Switches
- Top Exit Guard
- Pressure Switch
- Pit Ladder Source: GC
- Smoke Detector Provisions
- STM - Regular Fire Retardant
- Schindler Ahead

Reverie CFE Prototype

Schindler 3300



Decoration Selection

	01 Ceiling type	6 LED Down Light - Round Spots
	02 Ceiling Finish	Stainless Steel 441
	03 Car door	441 #4 Stainless Steel
	04 Side wall	Laminate None - Type To Be Defined.
	05 Rear wall	Laminate None - Type To Be Defined.
	06 Skirting	Skirting Flush Aluminum
	07 Fixtures	Standard Stainless Steel 301
	08 Handrail	1 Flat(1/2" X 2") Brushed Aluminum Rear walls
	09 Landing doors and frames	4 Stainless Steel 441

01

02

03

04

05

06

08

09

Project Name: Reverie CFE Prototype
Project ID: 815310918

Date: 05/21/2026
Offer: 304181218

Opportunity ID: 205066527
Schindler Elevator Corporation

Page 5/13



appliances

Building the Future, Together.

 Electrolux | FRIGIDAIRE

REVERIE APPLIANCE SPECS

Date: 5.21.26



Building the
Future, Together.



STANDARD UNITS



25.6 Cu. Ft. 36" Standard Depth Side by Side Refrigerator

Side-By-Side Refrigerator

Available Products: FRSS2623AB, FRSS2623AD, FRSS2623AS, FRSS2623AW

Available Colors: Black, Black Stainless Steel, Stainless Steel, White

Version: 08/22

Product Specifications

Refrigerator

Crisper Color	Clear
Dairy Bin	Yes
Door Bin Color	Clear
Interior Lighting	LED
Shelf Material	Glass
Water Filter	Yes
Number of Adjustable 2 Liter Door Bins	2
Number of Adjustable Gallon Door Bins	2
Total Number of Door Bins	4
Number of Adjustable Shelves	3
Number of Crispers	2
Air Filtration	Yes
Air Filter Included	No

Ice Maker

Ice Maker	Yes
-----------	-----

Dispenser

Dispenser Height	8 1/8"
Crushed Ice	Yes
Cube Ice	Yes
Dispenser	Yes
Water	Yes

Dimensions and Volume

Height With Hinge	69 7/8"
Height Without Hinge	68 5/8"
Width	36 1/8"
Width of Cabinet	35 7/8"
Depth of Cabinet	28 3/4"
Depth With Door	32 1/2"
Depth With Door 90° Open	50"
Depth With Door and Handle	35"
Fresh Food Capacity	16.6 Cu. Ft.
Freezer Capacity	9 Cu. Ft.
Total Capacity	25.6 Cu. Ft.

Freezer

Automatic Defrost	Yes
Baskets / Bins Color	Clear
Door Bin Color	Clear
Interior Lighting	LED
Shelf Material	Wire
Number of Adjustable Door Bins	4
Number of Baskets / Bins	1
Total Number of Door Bins	4
Number of Fixed Shelves	2
Total Number of Shelves	2

Controls

Air Filter Indicator	Yes
Digital Display	No
Door Ajar Alarm	Yes
Control Lock	No
Ice Maker On/Off	Yes
Power Failure Alarm	Yes
Power On/Off	No
Sabbath Mode	No
Vacation Mode	No
Water Filter Indicator	Yes

Exterior

Front Rollers	Yes
Rear Rollers	No
Water Inlet Location	Right Bottom Rear


Electrical Specifications

Minimum Circuit Required	15 Amps
--------------------------	---------

Performance Certifications and Approvals

ENERGY STAR Certified	Yes
-----------------------	-----

Installation Diagram

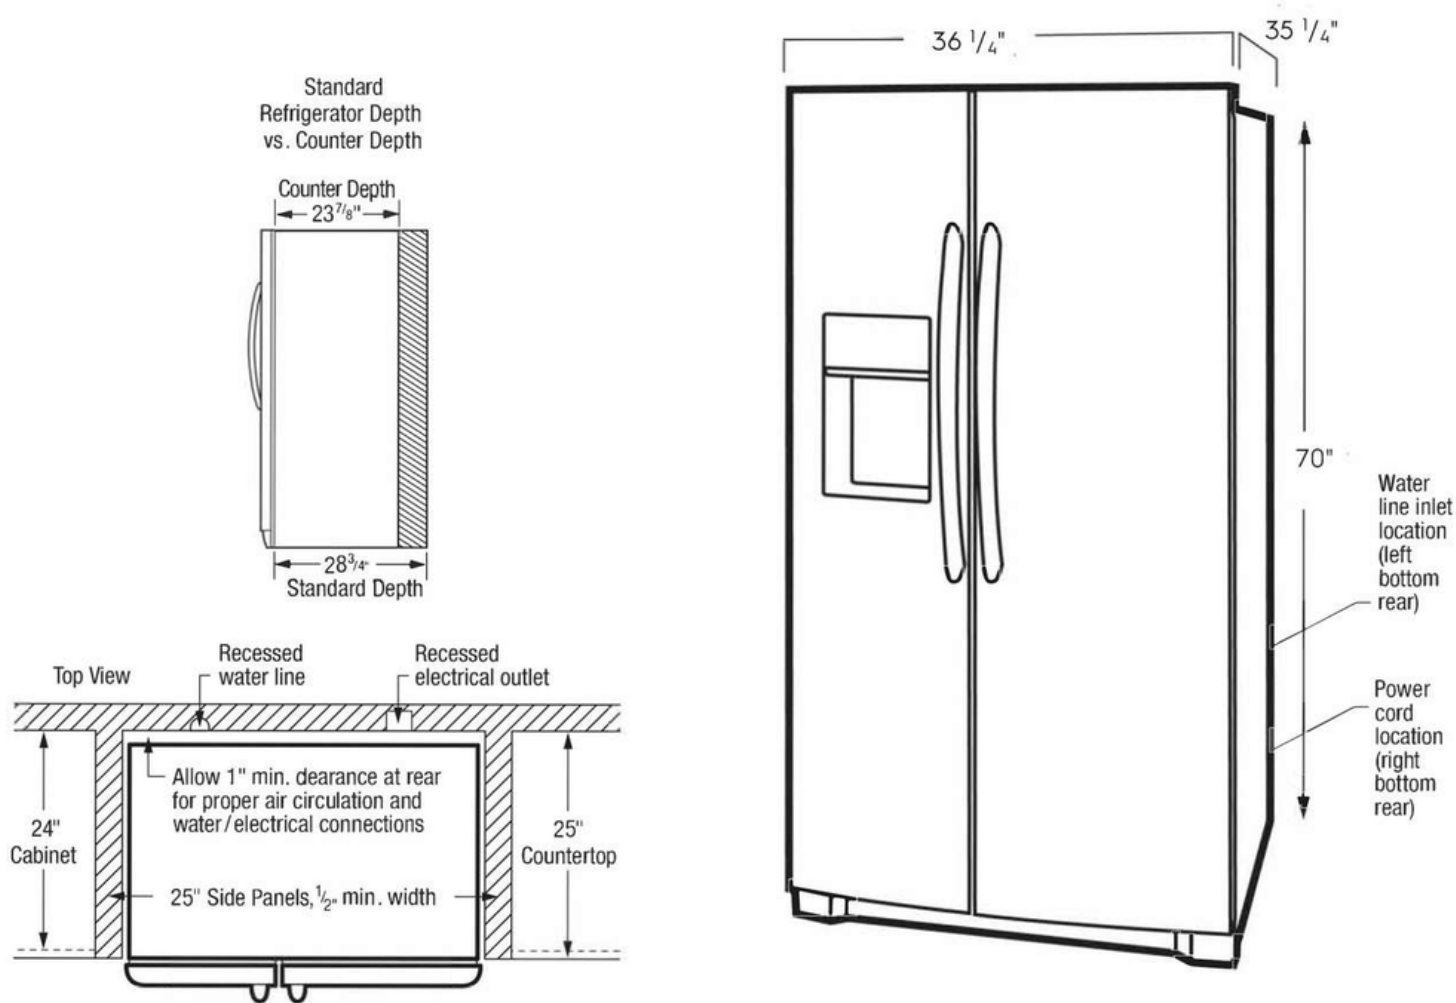



30" Freestanding Electric Range

Electric Range

Available Products: FCRE3062AB, FCRE3062AS, FCRE3062AW

Available Colors: Black, Stainless Steel, White

Product Specifications

Cooking Controls

Bake	Yes
Broil	Yes
Cook Time	Yes
Delay Clean	Yes
Delay Start	Yes
Door Lock	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Off	Yes
Oven Light	Yes
Set Clock	Yes
Start	Yes
Steam Clean	Yes
Temperature Display	Yes
Timer On / Off	Yes
Up / Down Arrow	Yes
User Preferences	Yes
Warm Zone	Yes

Oven

Bake Element	2500 Watts
Bake Element Pass	8
Bake Element Type	Hidden
Broil Element	3000 Watts
Broil Element Pass	4
Number of Rack Positions	6
Oven Interior Color	Midnight Black
Oven Light Quantity	1
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Embossed
Rack Type 1	Flat
Rack Type 1 Quantity	2

Cooking Controls Function

Change between Continuous Bake Setting or 12-Hour Energy Saving Feature	Yes
Delayed Bake	Yes
Program Fahrenheit or Celsius	Yes
Silent Control Panel	Yes

Cooktop

Cooking Surface Type	Smooth
Element On Indicator Light	Yes
Hot-Surface Indicator Light	Yes
Keep Warm Zone Light	Yes

Drawer

Drawer Handle Style	Integrated
Drawer Type	Storage

Display

Control Location	Rear
Display Interface Color	White
Display Type	Membrane

Electrical Specifications

Connected Load @ 240V	12 kW
Minimum Circuit Required	40 Amps
Voltage Rating	240 V

General Specifications

Frigidaire Fit Promise	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Installation Diagram

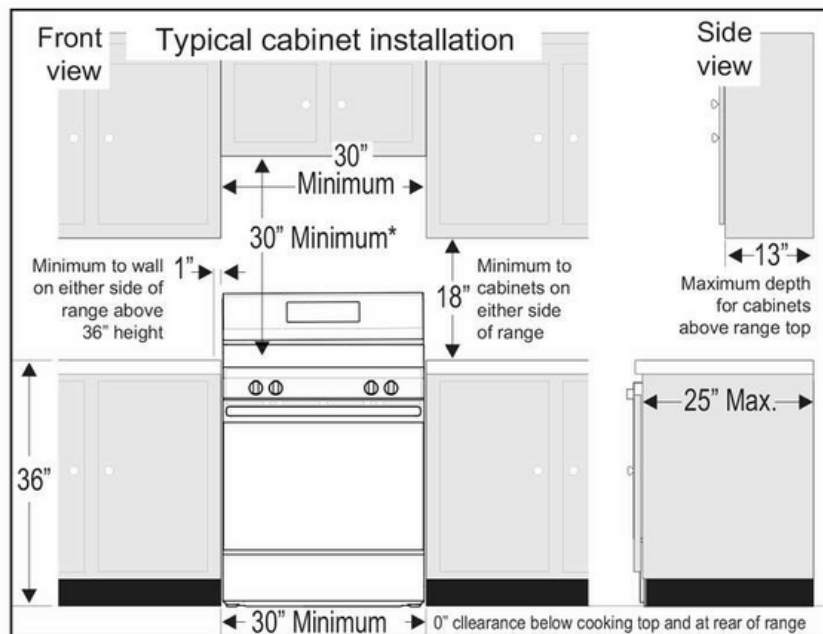


Fig. 1



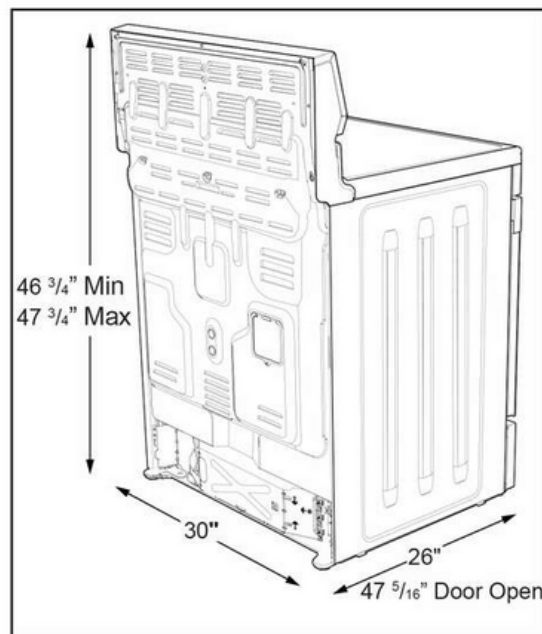


Fig. 2

"30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND INCORRECT COUNTERTOP AND CABINET CUTS.

TO ELIMINATE THE RISK OF BURNS OR FIRE BY REACHING OVER HEATED SURFACE UNITS, CABINET STORAGE SPACE LOCATED ABOVE THE SURFACE UNITS SHOULD BE AVOIDED. IF CABINET STORAGE IS TO BE PROVIDED, THE RISK CAN BE REDUCED BY INSTALLING A RANGE HOOD THAT PROJECTS HORIZONTALLY A MINIMUM OF 5" (127 mm) BEYOND THE BOTTOM OF THE CABINETS.

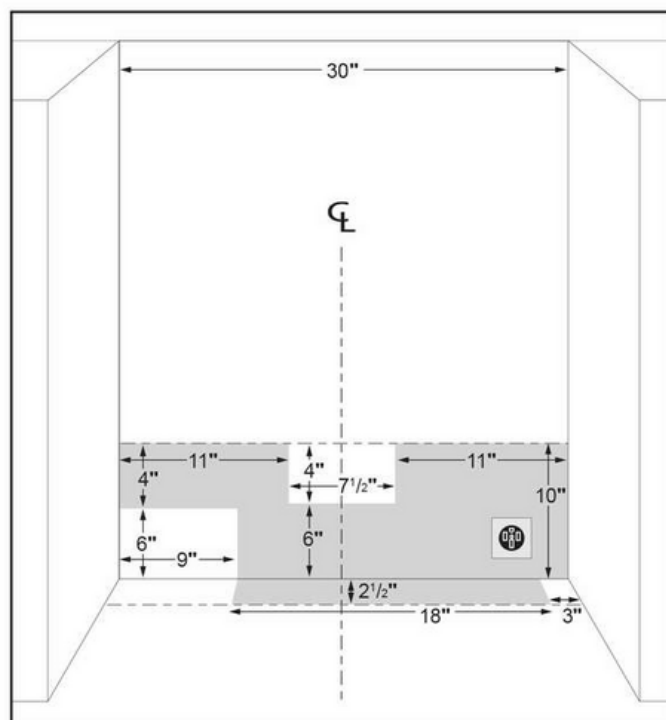

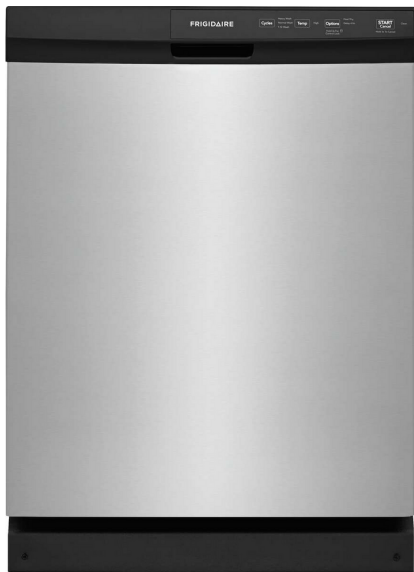

24" Built-In Dishwasher

Dishwasher

Available Products: FFCD2413UB, FFCD2413US, FFCD2413UW

Available Colors: Black, Stainless Steel, White

Product Specifications

Dishwasher

Detergent Dispenser	Yes
Filter Material	Stainless Steel
Filter Trap	Removable
Filtered Water	100 %
Hard Food Disposer or Filtration	Yes
Place Setting Capacity	14
Rinse Aid Dispenser	Yes
Tub Design	Tall Tub
Tub Material	Plastic
Wash Levels	5
Wash System	Direct Feed
Water Pressure	120 psi
Water Usage	6 Gallons

Dishwasher Options

Drying System	Static Vent
Heated Dry	Yes
High Temperature	Yes
Start/Cancel	Yes

Upper Rack

Minimum Height Clearance	8"
--------------------------	----

Exterior

Door Latch	Squeeze
------------	---------

Electrical Specifications

Voltage Rating	120 V
----------------	-------

General Specifications

Annual Energy	270 kWh
Prop 65 Label	Yes
Sound Level	55 dBA
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

UL Listed	Yes
Meets ASSE 1006 Requirements	Yes
NSF Certified	No

Dishwasher Cycles

Heavy	Yes
Light	Yes
Normal	Yes
Number of Cycles	3
Upper Rack	Yes

Lower Rack

Minimum Height Clearance	11"
Maximum Height Clearance	13"
Number of Silverware Basket	1
Rack Coating	PVC
Rack Type	Basic

Controls

Delay Start Hours	4
Control Lock	Yes

Dimensions and Volume

Width	23 7/8"
Depth	25"
Depth With Door Open	49 1/4"
Minimum Height	33 1/2"
Maximum Height	35"



Installation

Number of Leveling Legs	4
-------------------------	---

Performance Certifications and Approvals

CEE Tier	Tier 1
ENERGY STAR Certified	Yes

Installation Diagram

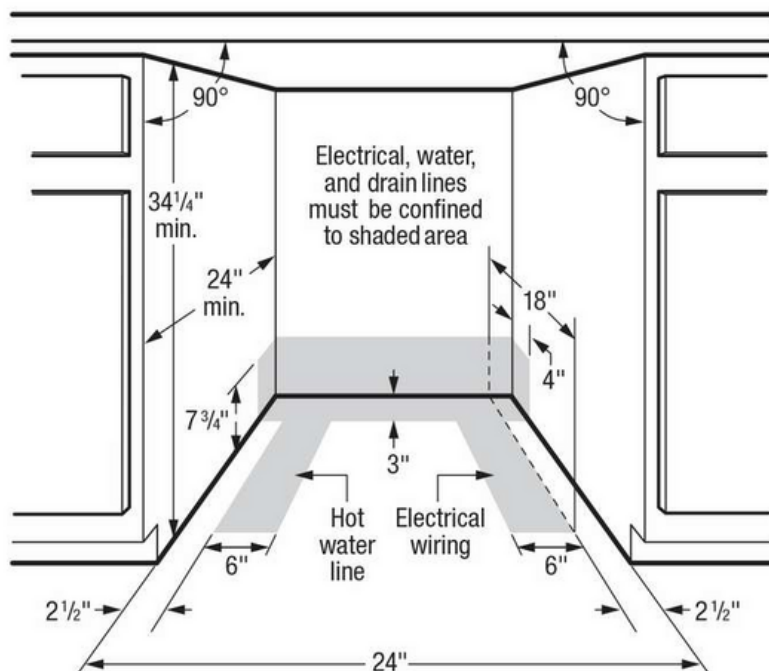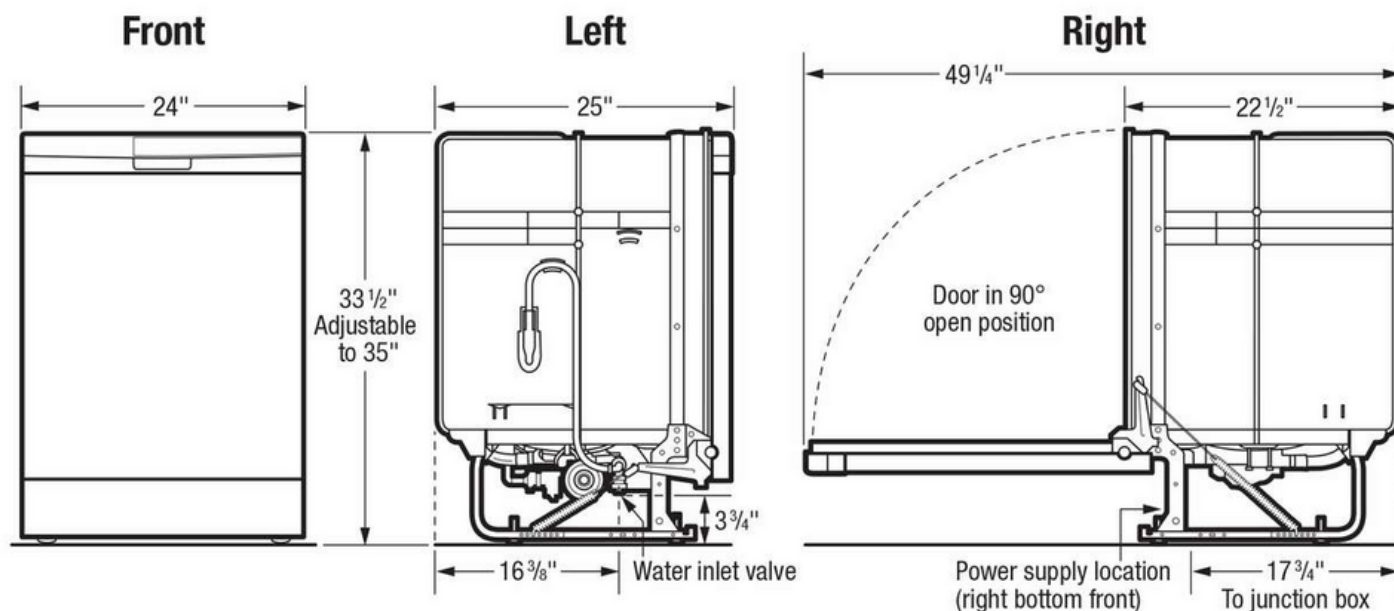


1.7 Cu. Ft. Over-The-Range Microwave

Over-The-Range Microwave

Available Products: FMOS1746BS, FMOS1746BB, FMOS1746BW

Available Colors: Stainless Steel

Version: 09/24

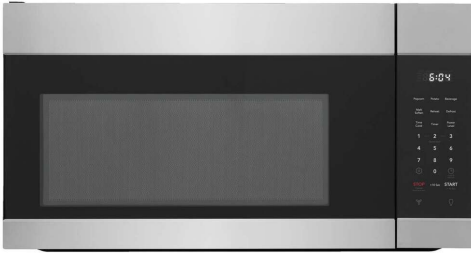

Product Specifications

Cooking Controls

Clock	Yes
Cooking Power	1000 Watts
Defrost Time	Yes
Defrost Weight	Yes
Number of Power Levels	10

Ventilation System

Exhaust Fan Speeds	2
Maximum Air Flow Capacity	300 CFM
Minimum Air Flow Capacity	105 CFM
Maximum Sones Rating	7 sone
Minimum Sones Rating	2.5 sone
Grease Filter Included	Yes
Grease Filter Quantity	2
Grease Filter Dishwasher Safe	Yes
Removable Grease Filter	Yes
Charcoal Filter Included	Yes
Ducted Vent	Yes
Ductless Vent	Yes

Microwave Control Features

+ 10 Seconds	Yes
+ 30 Seconds	Yes
Quick Start	Yes

Display

Control Location	Right
Display Interface Color	White
Display Type	Membrane

Internal Specifications

Interior Color	White
Interior Light Quantity	1
Interior Light Type	Incandescent
Interior Light Wattage	20 Watts
Turntable Diameter	12 2/5"
Turntable Material	Glass

Microwave Cooking

Beverage	Yes
Melt / Soften	Yes
Popcorn	Yes
Potato	Yes
Reheat	Yes

Controls

Control Lock	Yes
--------------	-----

Additional Settings

Child Lock	Yes
Clock Display On / Off	Yes
Clock Settings	Yes
Demo On / Off	Yes
Setting Weight Lb / Kg	Yes
Surface Cooking Light	Yes
Timer On / Off	Yes
Vent Fan	Yes

Exterior

Door Swing	Side-Swing Door
------------	-----------------

Surface Light System

Lighting Type	Incandescent
---------------	--------------


Electrical Specifications

Amps @ 120 Volts	13.5 Amps
Connected Load @ 120V	1.55 kW
Voltage Rating	120 V
Watts @ 120 Volts	1500 Watts

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Installation Diagram

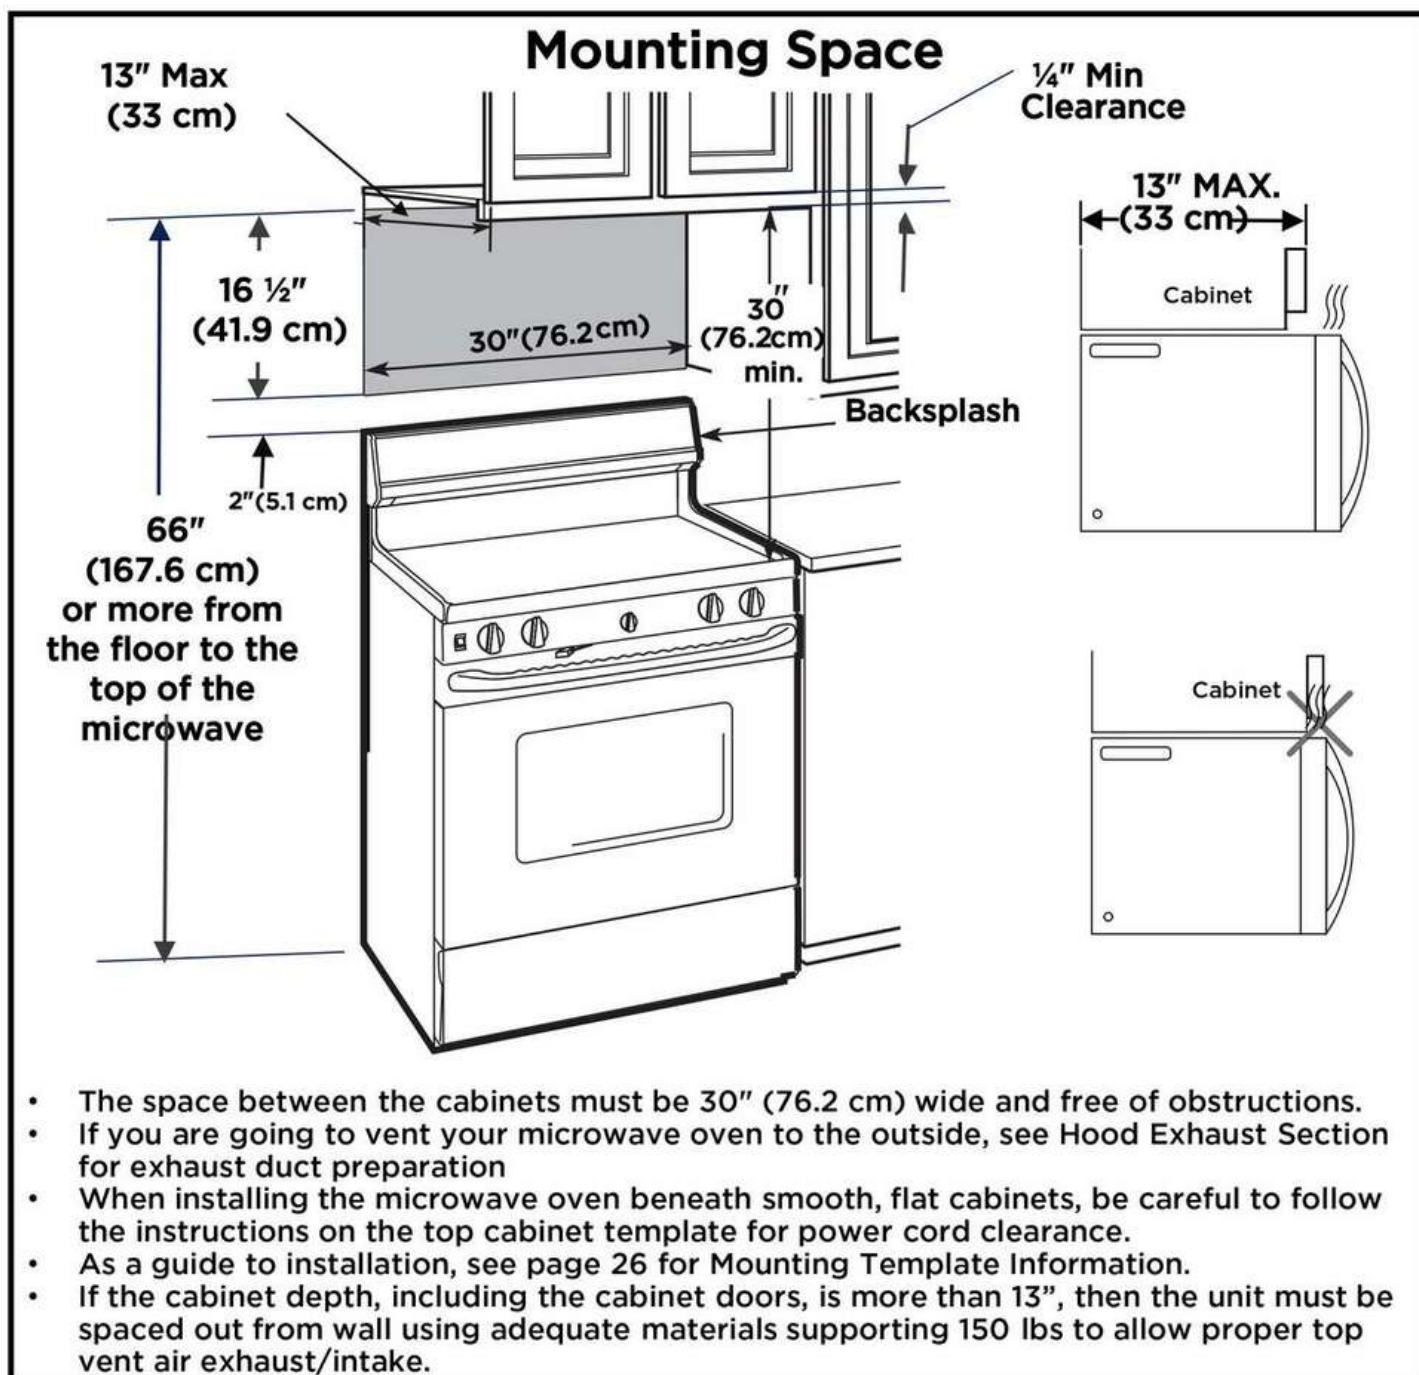

Building the
Future, Together.



HC UNIT

FRIGIDAIRE

GALLERY



25.6 Cu. Ft. 36" Standard Depth Side by Side Refrigerator

Side-By-Side Refrigerator

Available Products: GRSS2652AD, GRSS2652AF

Available Colors: Black Stainless Steel, Stainless Steel

Version: 08/22

Product Specifications

Refrigerator

Crisper Color	Clear
Dairy Bin	Yes
Deli Drawer	Yes
Door Bin Color	Clear
Humidity Controls	Manual
Interior Lighting	LED
Shelf Material	Glass
Water Filter	Yes
Number of Adjustable 2 Liter Door Bins	2
Number of Adjustable Gallon Door Bins	2
Total Number of Door Bins	4
Number of Adjustable Shelves	3
Number of Crispers	2
Air Filtration	Yes
Air Filter Included	Yes

Ice Maker

Ice Maker	Yes
-----------	-----

Dispenser

Dispenser Height	8 9/10"
Crushed Ice	Yes
Cube Ice	Yes
Dispenser	Yes
Water	Yes

Dimensions and Volume

Height With Hinge	69 7/8"
Height Without Hinge	68 5/8"
Width	36 1/8"
Width of Cabinet	35 7/8"
Depth of Cabinet	28 3/4"
Depth With Door	33 3/8"
Depth With Door 90° Open	50"
Depth With Door and Handle	35 7/8"
Fresh Food Capacity	16.6 Cu. Ft.
Freezer Capacity	9 Cu. Ft.
Total Capacity	25.6 Cu. Ft.

Freezer

Automatic Defrost	Yes
Baskets / Bins Color	Clear
Door Bin Color	Clear
Interior Lighting	LED
Pizza / Ice Cream Shelf	Yes
Shelf Material	Glass
Number of Adjustable Door Bins	4
Number of Baskets / Bins	2
Total Number of Door Bins	4
Number of Fixed Shelves	3
Total Number of Shelves	3

Controls

Air Filter Indicator	Yes
Digital Display	No
Door Ajar Alarm	Yes
Control Lock	Yes
Ice Maker On/Off	Yes
On/Off Display	Yes
Power Failure Alarm	Yes
Sabbath Mode	Yes
Water Filter Indicator	Yes

Exterior

Front Rollers	Yes
Rear Rollers	No
Water Inlet Location	Right Bottom Rear

Electrical Specifications

Minimum Circuit Required	15 Amps
--------------------------	---------

Certifications and Approvals

ADA Compliant*	Yes
*ADA Compliant Disclaimer	Accessibility pursuant to Uniform Federal Accessibility Standards (UFAS) when used with optional water filter bypass.

Safety Certifications and Approvals

cUL Listed	Yes
------------	-----


For planning purposes only. We reserve the right to change specifications or discontinue models without notice. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

Installation Diagram

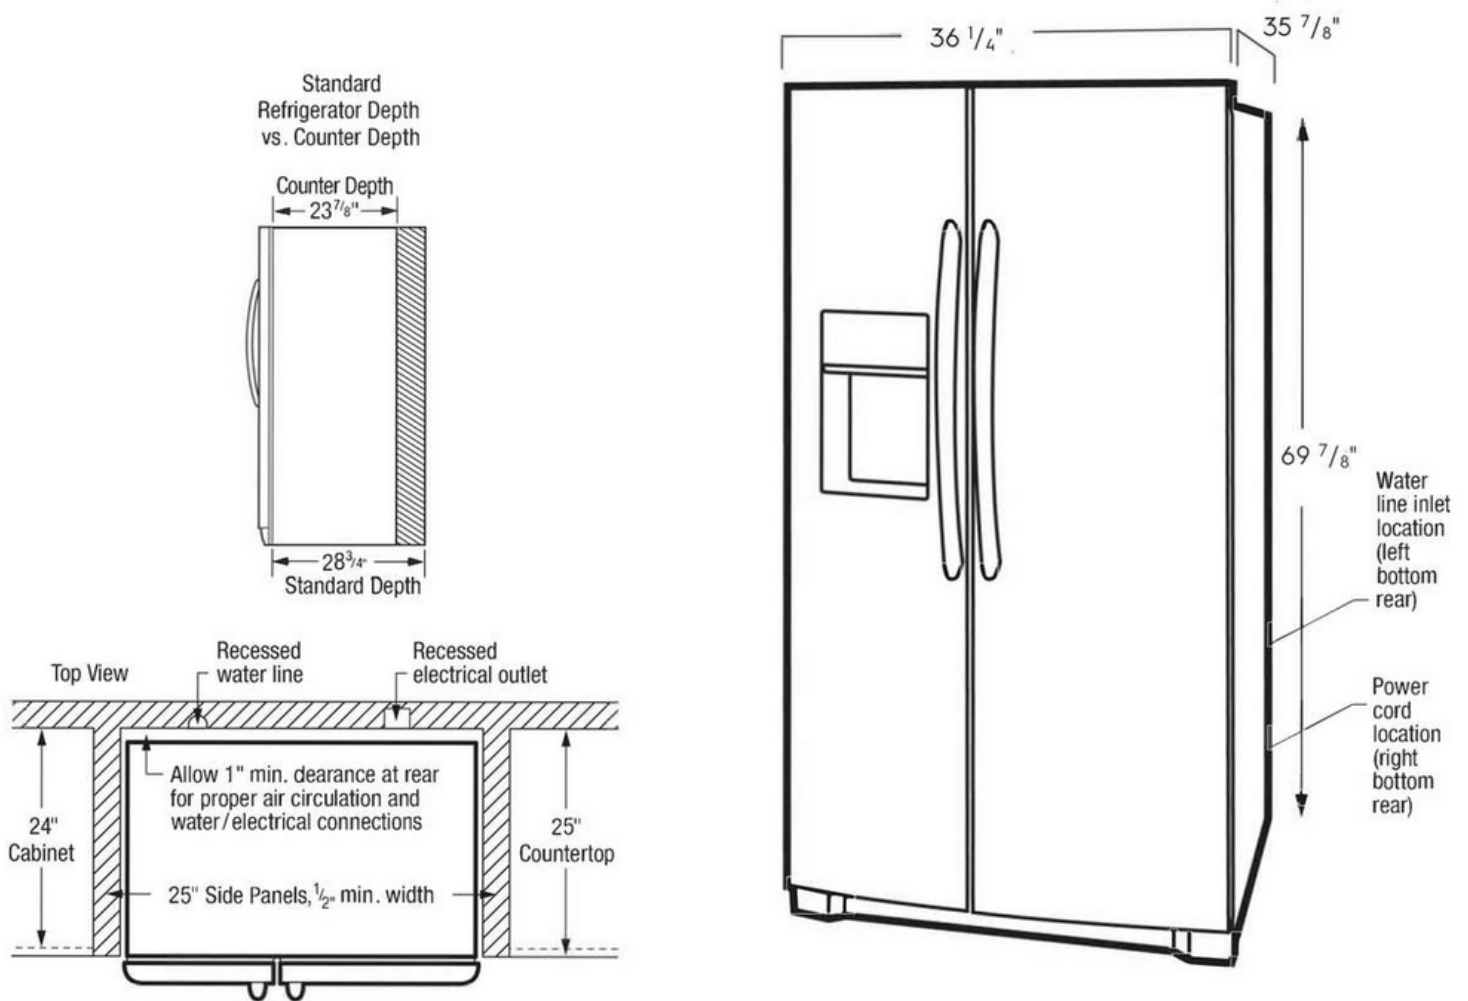



30" Front Control Electric Range

Electric Range

Available Products: FCFE3062AB, FCFE3062AS, FCFE3062AW

Available Colors: Black, Stainless Steel, White

Version: 04/24

Product Specifications

Cooking Controls

Bake	Yes
Broil	Yes
Cancel	Yes
Clear Off	Yes
Clock	Yes
Cook Time	Yes
Delay Start	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Lockout	Yes
On / Off (for each element)	Yes
Oven Light	Yes
Preheat	Yes
Probe	No
Steam Clean	Yes
Temperature Display	Yes
Timed Bake	Yes
Timer On / Off	Yes
Warm Zone	Yes

Oven

Bake Element	2500 Watts
Bake Element Pass	8
Bake Element Type	Hidden
Bake System	Yes
Broil Element	3000 Watts
Broil Element Pass	4
Broil System	Yes
Cleaning System	Yes
Number of Rack Positions	6
Oven Interior Color	Midnight Black
Oven Light Quantity	1
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Embossed
Rack Type 1	Flat
Rack Type 1 Quantity	2

Cooking Controls Function

Delayed Bake	Yes
Program Fahrenheit or Celsius	Yes
Silent Control Panel	Yes

Cooktop

Cooking Surface Type	Smooth
Element On Indicator Light	Yes
Hot-Surface Indicator Light	Yes

Drawer

Drawer Handle Style	Integrated
Drawer Type	Storage

Display

Control Location	Front
Display Interface Color	White
Display Type	Capacitive Touch

Electrical Specifications

Connected Load @ 240V	12 kW
Minimum Circuit Required	40 Amps
Voltage Rating	240 V

Certifications and Approvals

ADA Compliant	Yes
---------------	-----

Safety Certifications and Approvals

cUL Listed	Yes
UL Listed	Yes

Installation Diagram

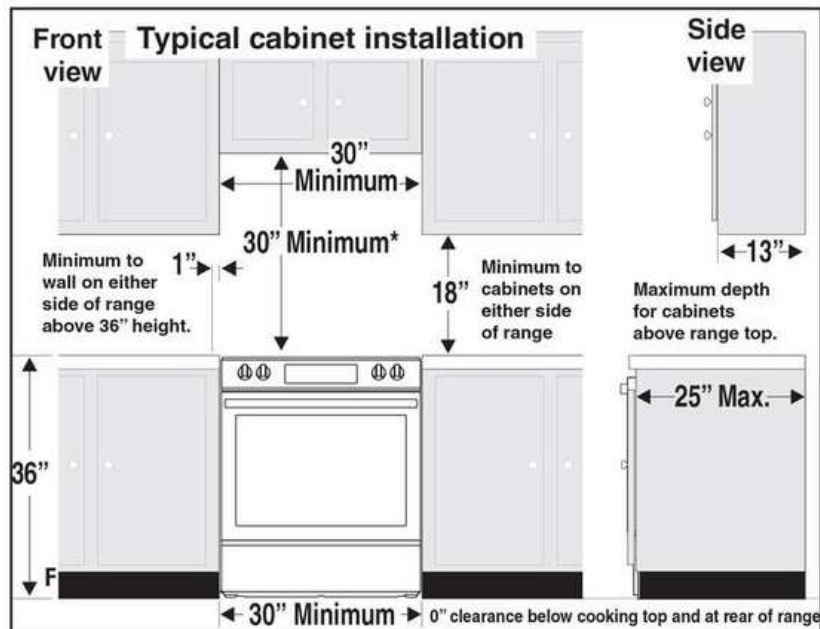


Fig. 1

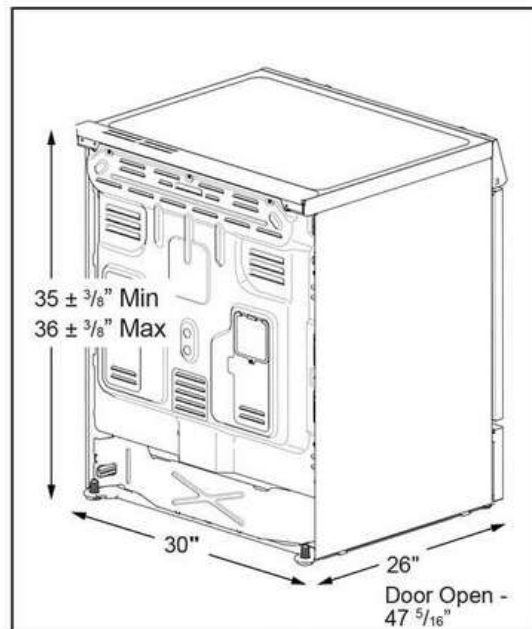


Fig. 2

*30" (762 mm) MINIMUM CLEARANCE BETWEEN THE TOP OF THE COOKING SURFACE AND THE BOTTOM OF AN UNPROTECTED WOOD OR METAL CABINET; OR 24" (610 mm) MINIMUM WHEN BOTTOM OF WOOD OR METAL CABINET IS PROTECTED BY NOT LESS THAN 1/4" (6 mm) FLAME RETARDANT MILLBOARD COVERED WITH NOT LESS THAN NO. 28 MSG SHEET STEEL, 0.015" (0.4 mm) STAINLESS STEEL, 0.024" (0.6 mm) ALUMINUM OR 0.020" (0.5 mm) COPPER. 0" (0 mm) CLEARANCE IS THE MINIMUM FOR THE REAR OF THE RANGE. FOLLOW ALL DIMENSION REQUIREMENTS PROVIDED ABOVE TO PREVENT PROPERTY DAMAGE, POTENTIAL FIRE HAZARD, AND INCORRECT COUNTERTOP AND CABINET CUTS.

TO ELIMINATE THE RISK OF BURNS OR FIRE BY REACHING OVER HEATED SURFACE UNITS, CABINET STORAGE SPACE LOCATED ABOVE THE SURFACE UNITS SHOULD BE AVOIDED. IF CABINET STORAGE IS TO BE PROVIDED, THE RISK CAN BE REDUCED BY INSTALLING A RANGE HOOD THAT PROJECTS HORIZONTALLY A MINIMUM OF 5" (127 mm) BEYOND THE BOTTOM OF THE CABINETS.

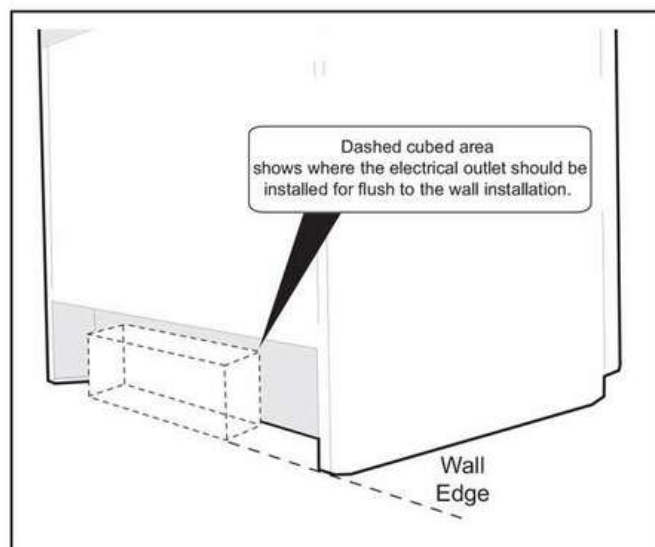


Fig. 3



24" Built-In Dishwasher

Dishwasher

Available Products: FFBD2420UB, FFBD2420US, FFBD2420UW

Available Colors: Black, Stainless Steel, White

Version: 07/23

Product Specifications

Dishwasher

Automatic Temperature Control	Yes
Detergent Dispenser	Yes
Filter Material	Stainless Steel
Filter Trap	Removable
Filtered Water	100 %
Hard Food Disposer or Filtration	Yes
Motor Speeds	Single-Speed
Place Setting Capacity	12
Rinse Aid Dispenser	Yes
Smart Soil Sensor	Yes
Lower Spray Arm	Bi-Beam
Middle Spray Arm	Bi-Beam
Upper Spray Arm	Spray Arm
Tub Design	Tall Tub
Tub Material	Stainless Steel
Wash Levels	5
Wash System	Direct Feed
Water Pressure	120 psi
Water Usage	8.5 Gallons

Dishwasher Options

Drying System	Heated Dry
Heated Dry	Yes
High Temperature	Yes
Start/Cancel	Yes

Upper Rack

Cup Shelf	Yes
Fold-Down	Yes

Exterior

Door and Handle Design	Pocket
Door Latch	Pull

Electrical Specifications

Voltage Rating	120 V
----------------	-------

General Specifications

Sound Level	52 dBA
Annual Energy	240 kWh
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Dishwasher Cycles

China Crystal	Yes
Energy Saver	Yes
Favorite	No
Heavy	Yes
Light	No
Normal	Yes
Number of Cycles	6
Quick	Yes
Rinse Only	Yes
Upper Rack	Yes

Lower Rack

Number of Silverware Basket	3
Rack Type	Deluxe

Controls

Delay Start Hours	1-24 Hours
-------------------	------------

Dimensions and Volume

Minimum Height	32 4/10"
Maximum Height	35 1/4"
Width	24"
Depth	24"
Depth With Door Open	44 1/2"

Installation

Connection Location	Right Bottom
Number of Leveling Legs	4

Certifications and Approvals

ADA Compliant	Yes
---------------	-----

Safety Certifications and Approvals



UL Listed	Yes
Meets ASSE 1006 Requirements	Yes
NSF Certified	Yes

24" Built-In Dishwasher	Dishwasher
Available Products: FFBD2420UB, FFBD2420US, FFBD2420UW	Available Colors: Black, Stainless Steel, White
Version: 07/23	

Performance Certifications and Approvals


CEE Tier	Tier 1
ENERGY STAR Certified	Yes

Installation Diagram

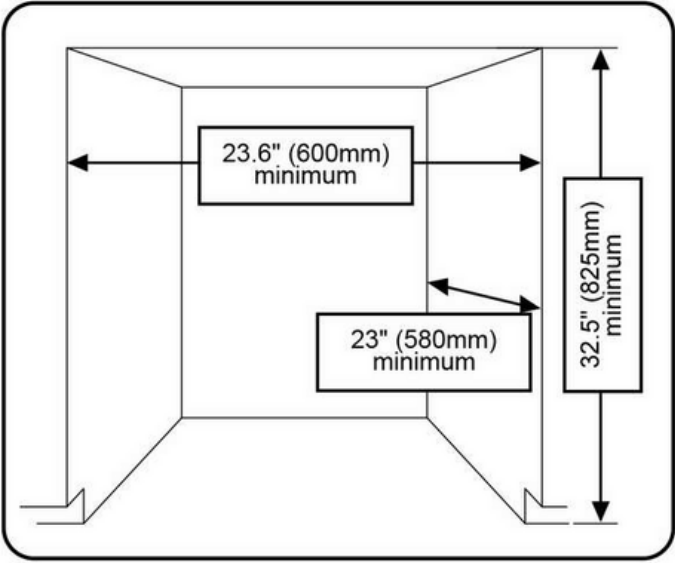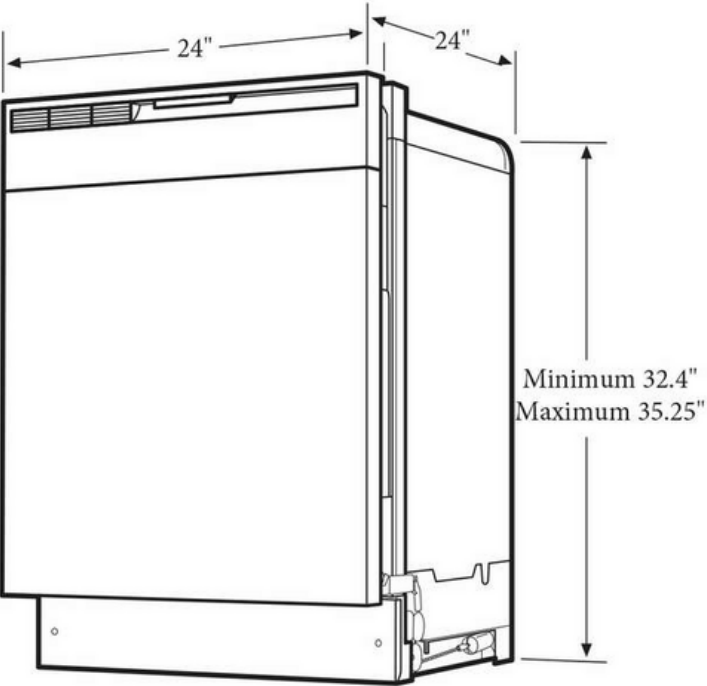

FRIGIDAIRE

GALLERY

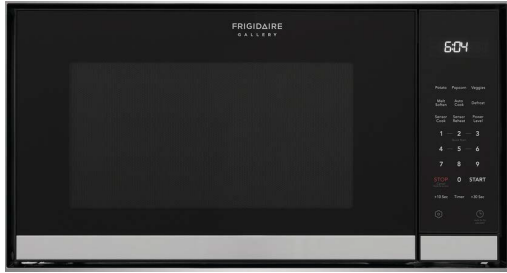

2.2 Cu Microwave

Countertop Microwave

Available Products: GMBS3068BD, GMBS3068BF

Available Colors: Black Stainless Steel, Stainless Steel

Version: 05/24

Product Specifications

Cooking Controls

Cooking Power	1100 Watts
Number of Power Levels	10

Microwave Control Features

+ 10 Seconds	Yes - One Touch
+ 30 Seconds	Yes - One Touch
Quick Start	Yes

Exterior

Door Swing	Side-Swing Door
Two Step Door Operation	Yes

Dimensions and Volume

Height	13 5/8"
Width	24 7/16"
Depth	19 5/8"
Microwave Interior Height	11 1/4"
Microwave Interior Width	17 7/8"
Microwave Interior Depth	19 1/8"
Microwave Capacity	2.2 Cu. Ft.

Installation

Power Supply Connection Location	Right Top
----------------------------------	-----------

Safety Certifications and Approvals

cUL Listed	Yes
UL Listed	Yes

Microwave Cooking

Auto Cook	Yes
Bacon	Yes
Beverage	Yes
Defrost	Yes
Melt / Soften	Yes
Popcorn	Yes
Potato	Yes
Reheat	Yes
Sensor Cooking	Yes
Sensor Reheat	Yes
Veggies	Yes

Additional Settings

Child Lock	Yes
Demo On / Off	Yes
Language Options	English and French
Setting Weight Lb / Kg	Yes
Timer On / Off	Yes
Volume # of Settings	4 (Includes Off)

Internal Specifications

Interior Color	White
Interior Light Quantity	1
Interior Light Type	LED
Interior Light Wattage	1.2 Watts
Turntable Diameter	16 1/2"
Turntable Material	Glass

Electrical Specifications

Voltage Rating	120 V
Watts @ 120 Volts	1100 Watts

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

For planning purposes only. We reserve the right to change specifications or discontinue models without notice.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca



30" Overhead Range Hood

Ventilation

Available Products: FCVW3025AB, FCVW3025AS, FCVW3025AW

Available Colors: Black, Stainless Steel, White

Version: 05/24

Product Specifications

Ventilation System

Ventilation Options	Convertible
Ducted Vent	Optional (See Manual)
Ductless Vent	Yes - Out of the Box
Exhaust Fan Speeds	2
Maximum Air Flow Capacity	230 CFM
Minimum Air Flow Capacity	170 CFM
Maximum Sones Rating	4.3 sone
Minimum Sones Rating	1.7 sone
Grease Filter Included	Yes
Grease Filter Quantity	1
Grease Filter Type	Aluminum Mesh
Grease Filter Dishwasher Safe	Yes
Charcoal Filter Included	Yes
Charcoal Filter Quantity	1

Surface Light System

Lighting Type	Incandescent
Number of Lights	1
Number of Light Settings	1

Electrical Specifications

Voltage Rating	120 V
----------------	-------

General Specifications

Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Controls

Control Type	Rocker Switch
--------------	---------------

Dimensions and Volume

Height	5"
Width	30"
Depth	18 5/8"

Installation

Duct Exit Location	Top
Hardwired	Yes
Power Supply Connection Type	Hard Wired

Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Building the
Future, Together.



LAUNDRY



Front Load Washer with LuxCare® Wash - 4.4 Cu. Ft.

Front Load Washer

Available Products: ELFW7337AW


Available Colors: White

Version: 08/22

Product Specifications

Washer		Washer Cycles	
Drum Light	No	Clean Washer	Yes
Drum Material	Stainless Steel	Cycle Count	7
Maximum Spin Speed	1,100 RPM	Delicates	Yes
Water Heater	No	Fast Wash	Yes
Water Level Adjustment	Yes	Normal	Yes
		Rinse and Spin	Yes
		Whites	Yes
		Heavy Duty	Yes
Washer Options		Soil Levels	
Extra Rinse	Yes	Extra Light	Yes
Extended Refresh	Yes	Light	Yes
Delay Start Time	1-12 Hours	Normal	Yes
		Heavy	Yes
Temperature Settings		Washer Spin Speeds	
Cool	Yes	Spin Speed Selections	4
Warm	Yes	High	Yes
Hot	Yes	Medium	Yes
Eco Cold	Yes	Low	Yes
		No Spin	Yes
Controls		Dispenser	
Cancel	Yes	Bleach Dispenser	Yes
Cycle Status Lights	Yes	Detergent Dispenser	Yes
Delay Start	Yes	Fabric Softener Dispenser	Yes
Control Lock	Yes		
Pause Function	Yes		
Power On/Off	Yes		
Start	Yes		
Exterior		Dimensions and Volume	
Door Latch	Yes	Height	38"
Reversible Door	Yes	Width	27"
		Depth	32"
Electrical Specifications		Washer Drum Capacity	4.4 Cu. Ft.
Minimum Circuit Required	15 Amps		
Voltage Rating	120 V		
Installation		Energy Data	
Optional Pedestal	Yes	Integrated Water Factor	3.2
Stackable	Yes	kWh/year	50 kWh
		Modified Energy Factor	2.76
		Water Usage/Year	4,154 Gallons
		kWh/cycle	0.17 kWh
Performance Certifications and Approvals			
CEE Tier	Tier 1		
ENERGY STAR Certified	Yes		
High Efficiency	Yes		

Installation Diagram

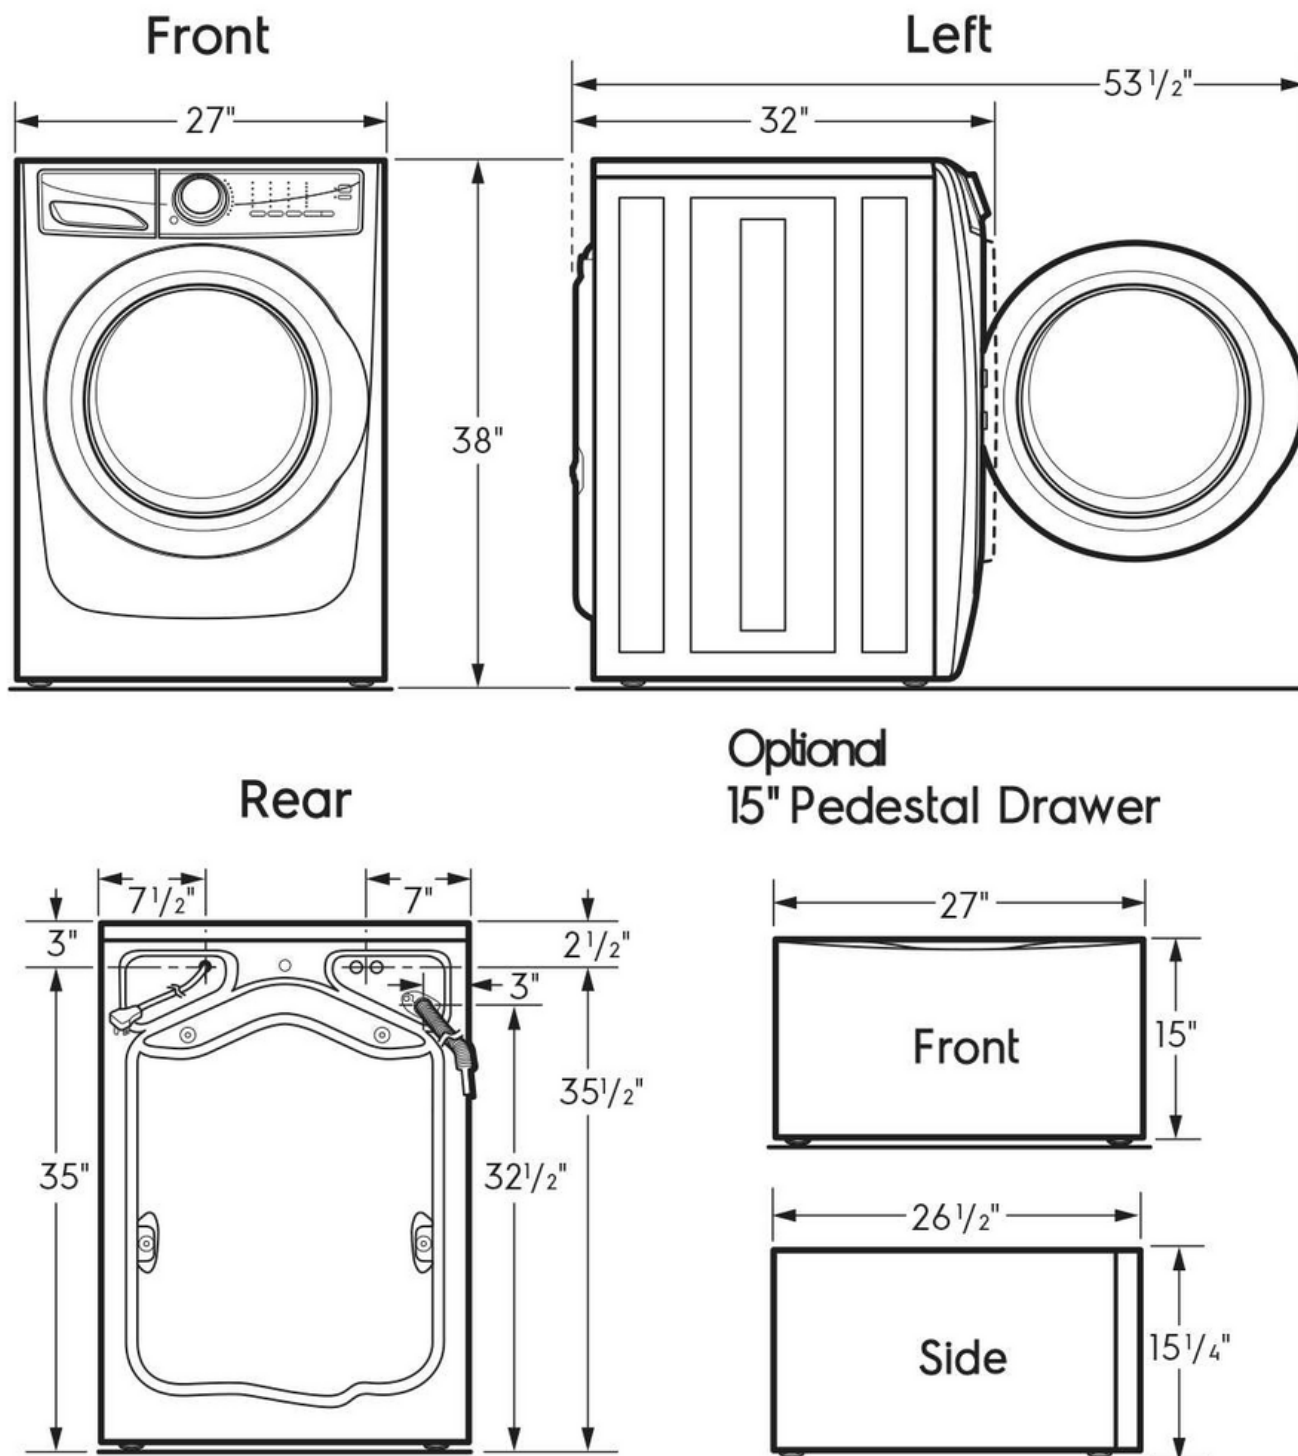



Front Load Electric Dryer – 8.0 Cu. Ft.

Dryer

Available Products: ELFE7337AW

Available Colors: White

Version: 08/22

Product Specifications

Dryer

Air Flow	200 CFM
Drum Back Type	Painted Steel
Drum Material	Painted Steel
Dryness Level Selections	Yes
Lint Filter	Yes
Moisture Sensor	Yes

Dryer Options

Wrinkle Release	Yes
Extended Tumble	Yes
Dry Boost	Yes
Delay Start Time	1-12 Hours

Dryness Level

Damp	Yes
High	Yes
Normal	Yes
Low	Yes

Exterior

Door Latch	Yes
Reversible Door	Yes

Electrical Specifications

Minimum Circuit Required	30 Amps
Voltage Rating	208/240v

Installation

Optional Pedestal	Yes
-------------------	-----

Performance Certifications and Approvals

ENERGY STAR Certified	Yes
-----------------------	-----

Dryer Cycles

Bulky	Yes
Cycle Count	7
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Normal	Yes
Timed Dry Time	Yes
Towels	Yes

Drying Temperatures

High	Yes
Low	Yes
Normal	Yes
Eco Dry	Yes

Controls

Cancel	Yes
Cycle Status Lights	Yes
Delay Start	Yes
Estimated Time Remaining	Yes
Control Lock	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes

Dimensions and Volume

Height	38"
Width	27"
Depth	32"
Dryer Drum Capacity	8 Cu. Ft.

Energy Data


kWh/year	620 kWh
Combined Energy Factor (CEF)	3.93
kWh/cycle	2.19 kWh

General Specifications

Chime On / Chime Off	Yes
Leveling Legs	Yes
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals	
UL Listed	Yes

Installation Diagram

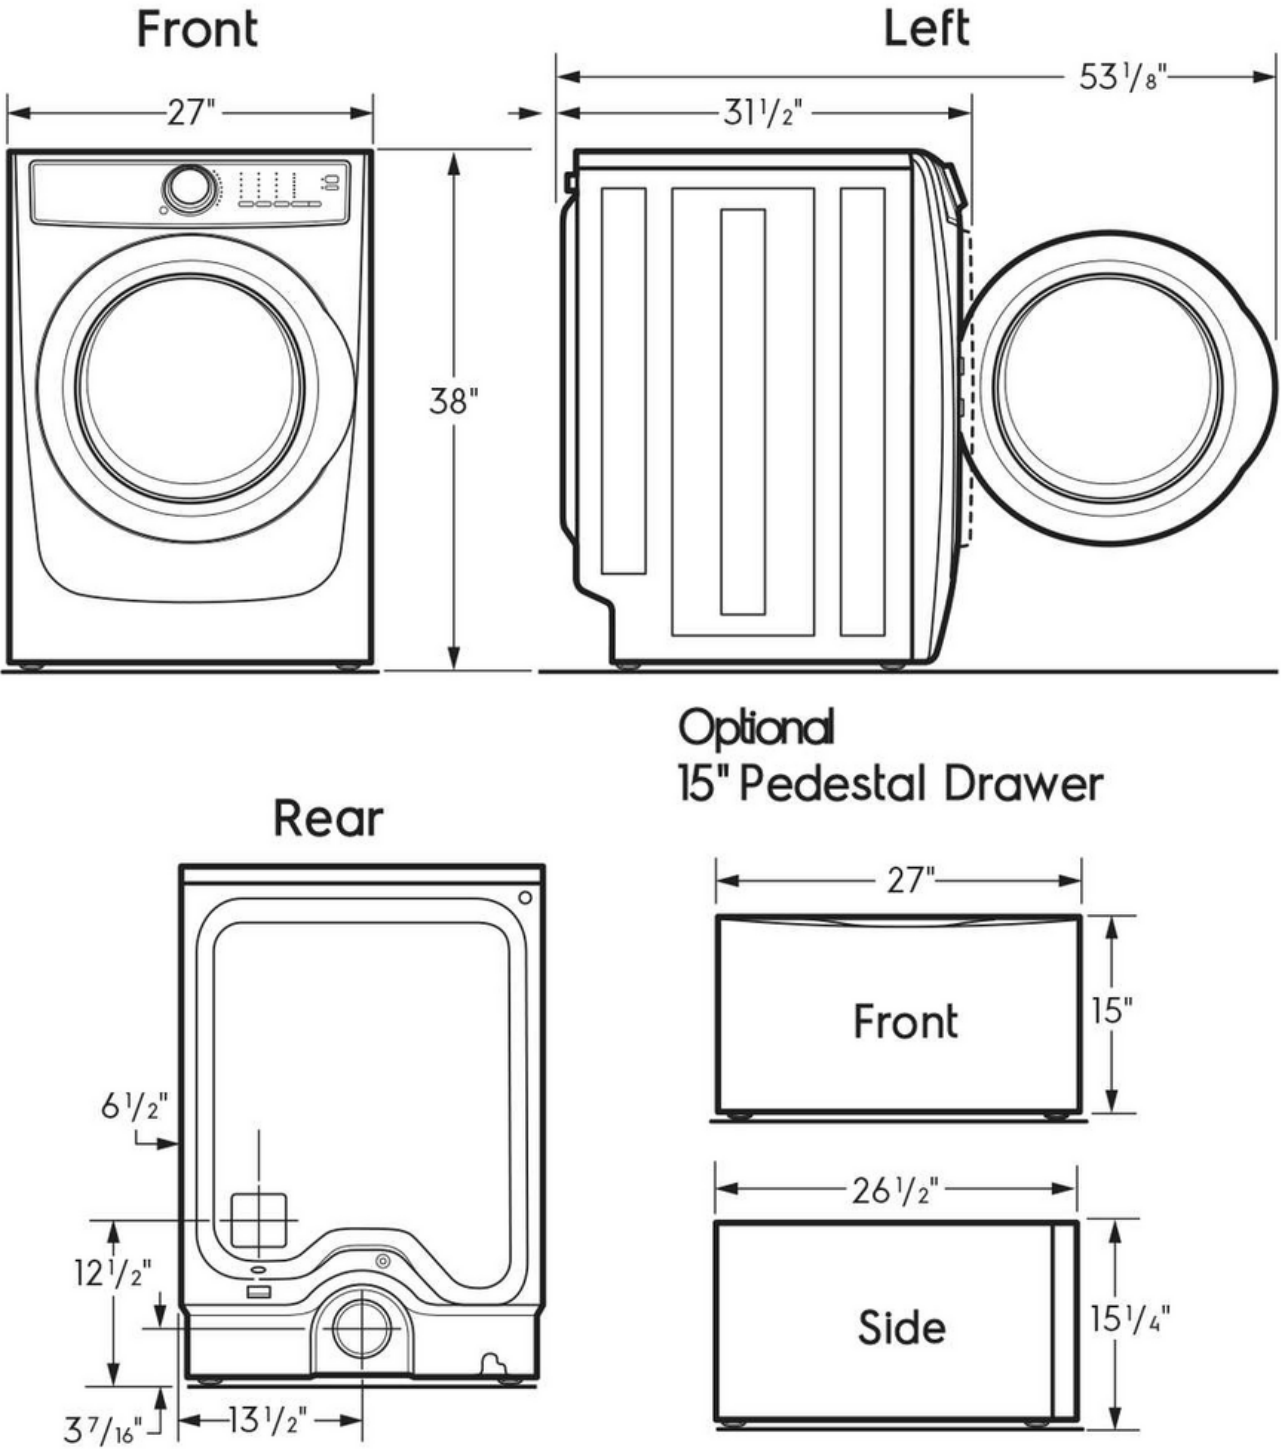



STACKIT7X

- **Product Details**

- Easily stack your washer and dryer when you use the Electrolux Stacking Kit for the Electrolux 17 series Front Load Washer and Dryer (STACKIT7X). This kit allows you to save space in your home or apartment for other things like laundry hampers, iron storage, and many other things. Stacking these units together also makes it easy to reach each unit for an easier laundry experience. Making it easier on you and the space in your home, this stacking kit will be a welcome addition to any home. Fits Electrolux front load washers and dryers including model #s containing 7337, 7437, 7537, 7637.

- Great for small laundry rooms or spaces
- Space saving
- Easy to install



Building the
Future, Together.



GARBAGE DISPOSAL



Waste Disposer

SC03DISPC1

1/3 Horsepower
Corded



Features

Horsepower	1/3
Motor RPM	2400
Capacity	29.8 oz (880ml)
Impellers	Stainless Steel Jam-Resistant Dual Impellers
Mounting Type	3-Bolt
Turntable Material	Stainless Steel
Grind Ring Material	Stainless Steel
Feed Type	Continuous
Controls	Wall Switch
Sound Shell	Partial
Splash Guard	Removable
Motor Type	High-Torque Permanent Magnet
Sink Stopper	Yes
Manual Overload Protect	Yes
Drain Outlet Diameter	1-1/2"
Drain Connector	Yes
Drain Elbow	Yes
Warranty	3 Years ¹

Specifications


Amps @ 120 Volts	4.5
Wiring Requirements	Corded
Voltage Rating	115V, 60Hz
Exterior Styling	Shell

Accessories

Sink Flange Kit	Stainless Steel
-----------------	-----------------

¹See warranty for complete details.

Product Dimensions



Specifications
subject to change.

Signature Features

TORQUE MASTER®

Balanced Grinding System:



A combination of computer designed and balanced components working in unison to provide superior torque grind speed and long system life.

3-Bolt Mounting System

Compact, lightweight design fits 90% of existing sink mounts for quick installation.

Removable Splashguard

Removable splash guard, ideal for easy cleaning and replacement.

Permanent Magnet Motor

Maximum torque instantly with the power to cut through potential jams..

3-Year Limited Warranty

See warranty for complete details.
LIFETIME warranty against failure due to corrosion.

Attached Power Cord

Ready to plug in.